



Outstanding shielding attenuation thanks to precision-manufactured radio-frequency chambers




- Reliable, interference-free radio frequency contacting and measurement of radio frequency signals
- Outstanding shielding attenuation > 60 dB in the frequency range up to 6 GHz
- Radio-frequency and RF-compatible shielding from external and internal interference signals
- Safe to use in MA xxxx basic units
- Quick, tool-free set-up - ready for use without readjustment

Application

The ESD-compatible radio-frequency exchangeable kit is used in MA xxxx basic units to contact radio-frequency DUTs reliably and measure them without interference. It has precision-manufactured radio-frequency chambers made of aluminium and achieves an outstanding shielding attenuation of > 60 dB in the frequency range up to 6 GHz. The DUTs are contacted using geometrically matched radio-frequency test probes.

Version

- ESD compatible
- Precision-manufactured radio frequency chambers made of aluminium
- Configurable radio-frequency interface
- Configurable internal interface
- Removable service cover
- Optional EMC-compliant radio-frequency transfers for connecting the radio-frequency DUTs
- Optional radio-frequency absorber for setting up an internal radio network

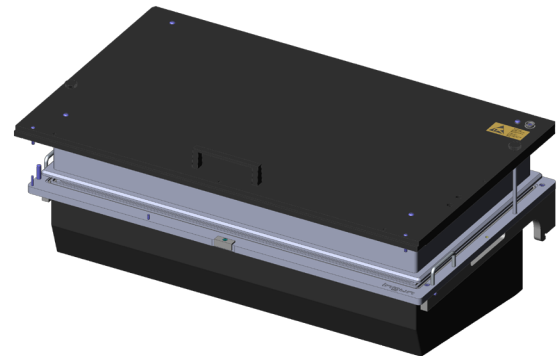

Signal connection (radio frequency transmissions)

Various EMC-compliant radio-frequency interfaces are available for connecting the DUTs from and to the shielding area, which are mounted on the radio-frequency interface. The radio-frequency signals are reliably transferred to the measuring system via the internal interface, which is equipped with interface blocks (SB-P) in the desired configuration.

Internal radio network (radio-frequency absorber)

Vacuum test fixtures (VA) are used for the reliable contacting of a small number of printed circuit boards versions in high quantities.

Delivery

Partially assembled upon delivery. The radio-frequency interface is easily fixed with just four screws at the corners, while the internal interface is supplied without screws. This is to allow better accessibility and quick processing. Both interfaces are unequipped.

Note:

For professional customisation of the RF exchangeable kit, refer to the customising guidelines document INFO 1317. To install the RF absorber, please refer to document INFO 4585. Document INFO 2133 provides information regarding the installation of the top contacting unit.

Note:

Eine hochfrequenzgeschirmte 2-Stufen Kontaktierung (ICT/FKT kombiniert) ist mit den HF-Austauschsätzen nicht möglich.

Exchangeable kit ATS MA14/HF/AL/ESD

Item 154014



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:	ATS manual test fixture (MA)
Subseries:	ATS MAxx
Series:	ATS MA14
Version:	RF, ESD, without interface
Scope of delivery:	Partially assembled
For tandem fixtures:	No
Max. interface signals:	1700
Interface blocks required:	No
Max. internal interface blocks:	0
Internal interface:	Not available
Dual-stage contacting:	No
Double-sided contact:	Yes, with compatible additional option
Weight:	18.7 kg [41.4 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
Low voltage:	No
RoHS-compliant:	Yes




Compatible with

Manual test fixtures (MA):

MA 3214

Technical data

Pushrod length:	60 mm [2.36 in]
Test probe installation height, top:	16 mm [.629 in]
Test probe installation height, bottom:	10.5 mm [.413 in]
Free space above PCB:	58 mm [2.28 in]
Useable area (WxD):	476 x 240 mm [18.7 x 9.44 in]
Outer dimensionS (WxDxH):	606 x 383 x 263 mm [23.8 x 15 x 10.3 in]

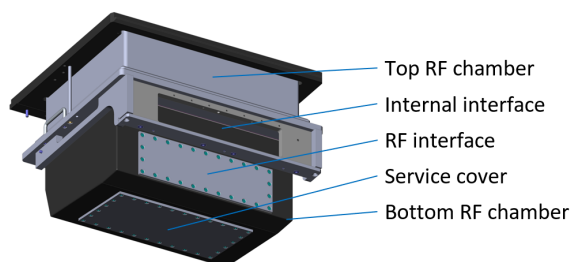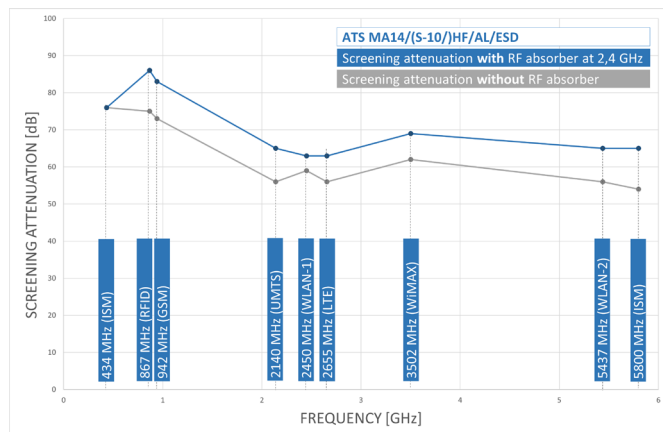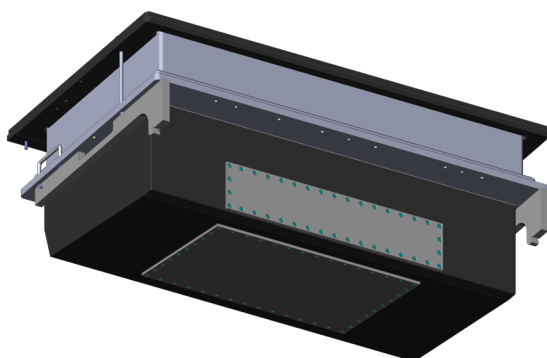

Exchangeable kit

ATS MA14/HF/AL/ESD

Item 154014



GO TO PRODUCT

ingun[®]

Partner for Future Technology

Accessories

Part no.	Designation	Version
Recommended gas pressure springs for use in MA xxxx basic units		
49316	GDF-185-60-300N-A6-A6-D	Gas pressure spring, 300 N, left mounted (in MA xxxx basic unit)
45832	GDF-185-60-400N-A6-A6	Gas pressure spring, 400 N, right mounted (in MA xxxx basic unit)
Matching radio-frequency absorber		
112730	HF-A-2,4GHz-ATSMA14/HF/AL	Radio-frequency absorber set from 2,4 GHz
112731	HF-A-3,5GHz-ATSMA14/HF/AL	Radio-frequency absorber set from 3,5 GHz
112732	HF-A-7,5GHz-ATSMA14/HF/AL	Radio-frequency absorber set from 7,5 GHz
Matching radio-frequency seals		
113480	ETK-MSD-ATSMA14/HF	Radio-frequency seal probe plate unit
32918	HF-D-SSD-RWP-ATSMA13/14/HF	Radio-frequency seal radio-frequency interface
Recommended radio-frequency transfers (excerpt)		
33800	HF-U-MCX-06GHz-50OHM-F-F	RF signals
53086	HF-U-SUBD-50-830pF-WW	Low voltage and serial signals
51358	HF-U-SUBD-09-100pF-WW	Bus- and HSD signals
43488	HF-U-USB2.0-AF-AF-2-SF	USB signals
48392	HF-U-RJ45-LAN1000-F-F-SF	LAN signals
43665	HF-U-D-8,5-QS4	Compressed air tube bushing
Matching single plates		
112556	KTP ATSMA14/HF/AL/ESD	Probe plate, FR4, both sides ESD coated, t = 10 mm
112555	ADP ATSMA14/HF/AL	Moving plate, FR3, t = 4 mm
112497	NHP ATSMA14/HF/AL/ESD	Pressure frame plate, 3.3547, t = 8 mm

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
MA exchangeable kits



ingun.com

EXCHANGEABLE KITS