

Locking unit - closed

FB-VER-G-ESO-MAxxxx

Item 36065




GO TO PRODUCT

- Secure locking of closed pressure frame during contacting

Application

To lock the closed pressure frame during contacting to ensure tests are not interrupted.

INGUN SELECTION



General data

Product group:	Locking units
Series:	FB-MAxxxx
Type:	
Version:	
Accessory type:	Additional function
Scope of delivery:	Must be installed upon delivery
Width:	70 mm [2.75 in]
Height:	80 mm [3.14 in]
Weight:	0.3 kg [.661 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Manual test fixtures (MA):	MA xxxx
Accessories:	ATE VAxxxx

Technical data

Stroke:	6 mm [.236 in]
Installation:	Thread M4
Max. voltage:	24 VDC (8 W)
Length:	153 mm [6.02 in]
Outer dimensionS (WxDxH):	70 x 153 x 80 mm [2.75 x 6.02 x 3.14 in]

Locking unit - closed


FB-VER-G-ESO-MAxxxx

Item 36065



ingun[®]

Partner for Future Technology

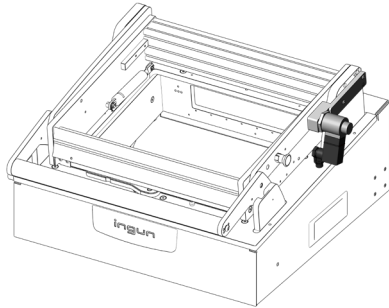

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com