

Electric LED analyser ELA-20-FEASA-F-OH3

Item 33685



GO TO PRODUCT

ingun[®]
Partner for Future Technology




- FEASA(TM) LED analyser
- Testing of several LEDs simultaneously for colour and brightness

Application

The FEASA(TM) LED Analyser is used to test several LEDs simultaneously for colour and brightness. The speed of the test depends on the intensity of the LEDs being tested, i.e. bright LEDs have a shorter test time, while weaker LEDs have a longer test time.

Interface

Connection via the serial RS232 interface requires an additional power supply, connection via the USB interface does not require an additional power supply.

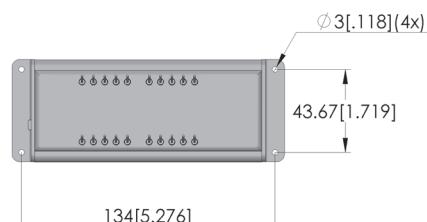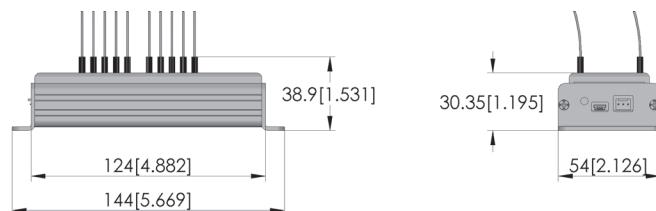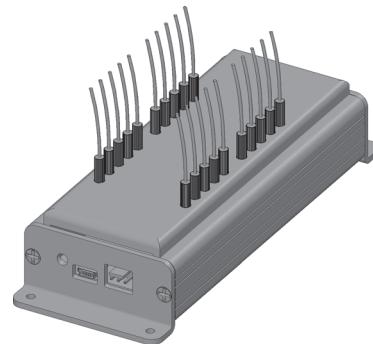

General data

Product group:

Electric accessory

MA 2012

Series:

ELA

VA 3070

Type:

Feasa-F (with housing)

ATS MAXX

Version:

Incl. 20x OH-3

ATS PAZxxx

Accessory type:

Customising accessories

Width:

54 mm [2.12 in]

Height:

39 mm [1.53 in]

Weight:

0.09 kg [.198 lbs]

Min. temperature:

0 °C [32 °F]

5,0 V

Max. temperature:

50 °C [122 °F]

20

RoHS-compliant:

Yes

144 mm [5.66 in]

600 mm [23.6 in]

1 mm [.039 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB