



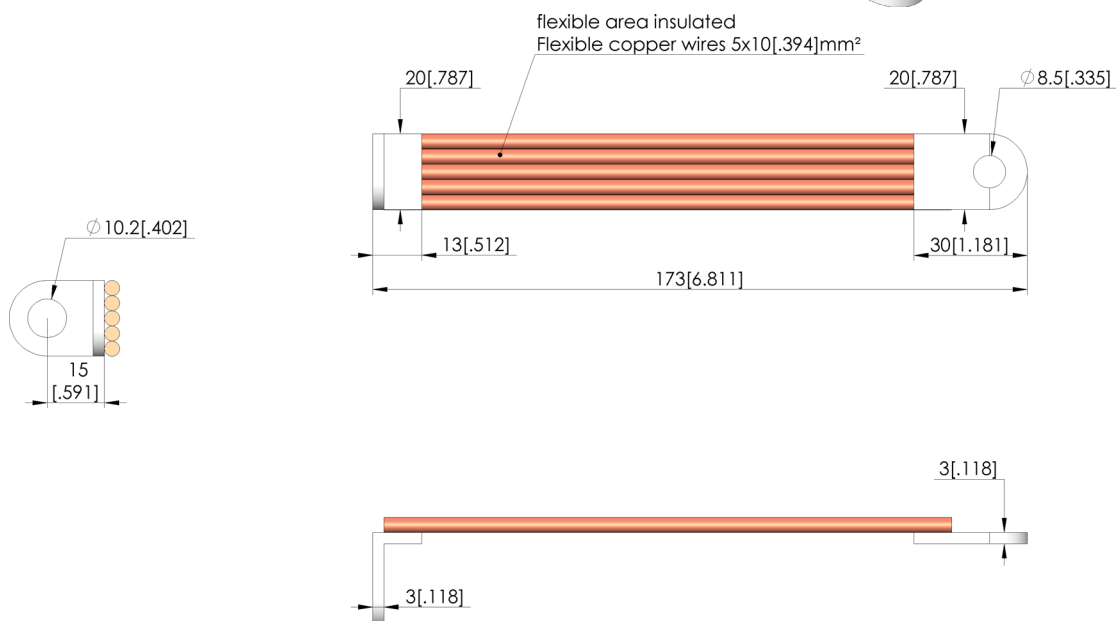

- Extremely low resistance cables made of pure copper wires with tin plated connectors
- Flexible copper cables to compensate the movement of the plunger
- Engineered to be exceptionally flexible, ensuring it exerts virtually no force on the continuous plunger probe
- Insulation made out of a transparent and thin silicone tube
- Maximum current capacity of 400A

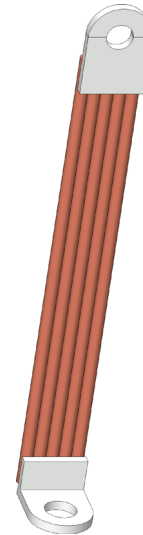

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-AWG08
SE-AWG08 plug with AWG08 cable
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Electrical data

Cable shielding:

Simple

Cable data

Cable length:
Cable type:

170 mm [6.69 in]

Connector data

Interface 1: AN-0001 cable eye, bracket - width 20mm, bore 10.2mm
Interface gender 1: F signal conductor female / socket
Version 1: Right angle
Interface 2: AN-0002 cable eye grade - width 20mm, Bohrung 8.5mm
Interface gender 2: F signal conductor female / socket
Version 2: Straight

**Test probes**

Part no.	Designation	Version
BCP-695-0001	BCP-695 360 1800 A 100004-54	Battery contacting probe
BCP-695-0002	BCP-695 360 1800 A 100004-62	Battery contacting probe
BCP-696-0001	BCP-696 360 2200 A 110004-54	Battery contacting probe
BCP-696-0002	BCP-696 360 2200 A 150004-54	Battery contacting probe
BCP-696-0003	BCP-696 360 2200 A 150004-62	Battery contacting probe

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test probes

