

# Exchangeable kit ATS MA160/ESD


Item 30800-KIT



GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology

- Quick, tool-free set-up, can be used without readjustment
- Available in standard and ESD versions, without internal interface
- Signal transmission using VG multipoint connectors for individual configurations
- Pressure plate unit and probe plate unit can be screwed together with stacking screws to form a unit with protected probe field
- Robust, durable design
- Can be customised using functional units for individual configurations
- Detailed accompanying documents (e.g., customising guidelines)

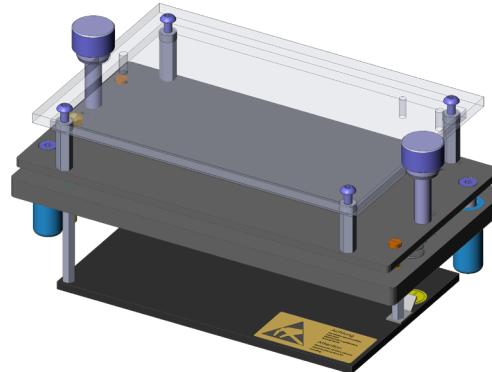

## General data

Product group:  
Subseries:  
Series:  
Version:  
Scope of delivery:  
For tandem fixtures:  
Max. interface signals:  
Interface blocks required:  
Max. internal interface blocks:  
Internal interface:  
Dual-stage contacting:  
Double-sided contact:  
Weight:  
Min. temperature:  
Max. temperature:  
Low voltage:  
RoHS-compliant:

ATS manual test fixture (MA)  
ATS MAxxx  
ATS MA160  
ESD without interface  
Unassembled  
No  
0  
No  
0  
Not available  
No  
No  
0.97 kg [2.13 lbs]  
10 °C [50 °F]  
60 °C [140 °F]  
No  
Yes

## Compatible with

Manual test fixtures (MA): MA 160

## Technical data

Pushrod length: 20 mm [.787 in]  
Test probe installation height, bottom: 10.5 mm [.413 in]  
Free space above PCB: 18 mm [.708 in]  
Permissible test voltage: 25VAC/60VDC  
Useable area (WxD): 160 x 100 mm [6.29 x 3.93 in]  
Outer dimensionS (WxDxH): 206 x 118 x 108 mm [8.11 x 4.64 x 4.25 in]

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
MA exchangeable kits

