

Detection - contacted

FB-ABF-K-HMK-VAxxxx-2S

Item 3409




ingun[®]
Partner for Future Technology

- Detection - PCB contacted
- Reliable status detection
- Quick, easy installation

Application

The module is used to detect if the PCB is contacted.

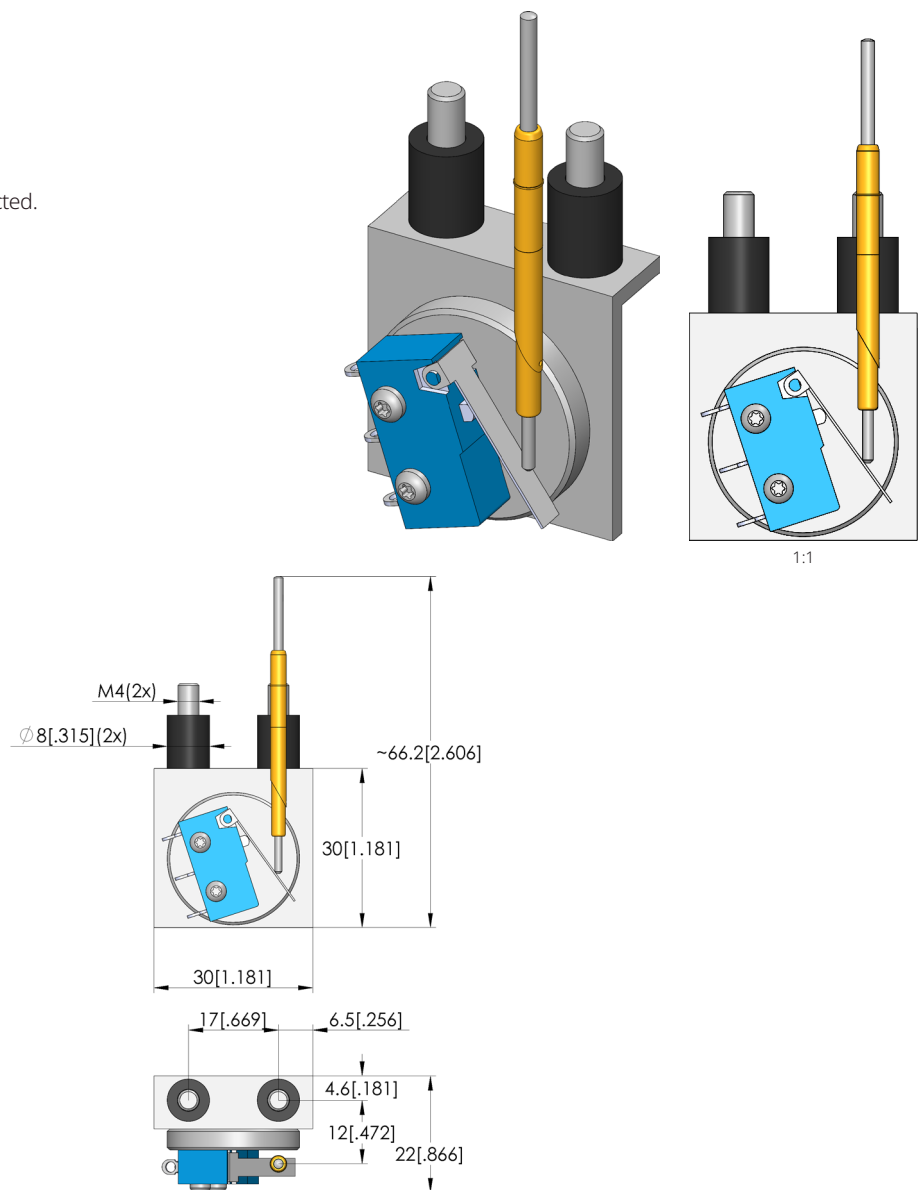

Detection - contacted

FB-ABF-K-HMK-VAxxxx-2S

Item 3409



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Functional units
FB-VAxxxx
Detection - contacted
Stroke sensor
Additional function
Switch incl. GKS-504-0021
22 mm [.866 in]
66.2 mm [2.6 in]
0.02 kg [.044 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Vacuum test fixtures (VA):

VA 20xx-2e

Technical data

Stroke:
Connection:
Force:
Max. current:
Installation:
Max. voltage:
Number of poles:
Length:
Outer dimensionS (WxDxH):

11 mm [.433 in]
Solder eyelet
3 N [10.7 ozf]
1 A
M4
12 V
3
30 mm [1.18 in]
22 x 30 x 66.2 mm [.866 x 1.18 x 2.6 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
Test fixture kits

