

# Test Probe VF4-202 230 A 15

Item VF4-0016



GO TO PRODUCT

**ingun**<sup>®</sup>




Partner for Future Technology

## Verrastprüfung

Zur Überprüfung der korrekten Verrastung des Kontaktterminals im Steckergehäuse



1:1

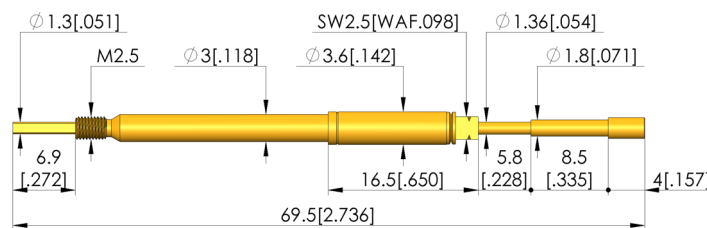

### General data

Screw-in torque max.:  
Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Continuous plunger:  
Screw-in torque:  
Compatible receptacle(s):  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

5 cNm [.442 lbf-in]  
Push-back probes  
Push-back probes  
VF4  
4 mm [157 mil]  
Post  
Yes  
Screw-in  
Yes  
No  
Yes  
 $\phi 1,3 \times 0,8 \times 6,9$   
3 – 5 cNm [.265 – .442 lbf-in]  
KS-VF4  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

### Tip style data

Tip style:  
Tip diameter:  
Tip style surface:  
Tip style material:

02 flat  
2.3 mm [.09 in]  
A gold  
2 steel

### Electrical data

Current load capacity / rated current:  
Typical resistance (Ri):

8 A  
30 mOhm

### Mechanical data

Total length:  
Barrel diameter:  
Maximum stroke:  
Spring pre-load:  
Spring force at working stroke:  
Recommended working stroke:

69.5 mm [2.73 in]  
3 mm [.118 in]  
5.5 mm [.216 in]  
3.1 N [11.1 ozf]  
15 N [53.9 ozf]  
5 mm [.196 in]

SCREW-IN TEST PROBE

# Test Probe


## VF4-202 230 A 15

Item VF4-0016



**ingun**<sup>®</sup>

Partner for Future Technology

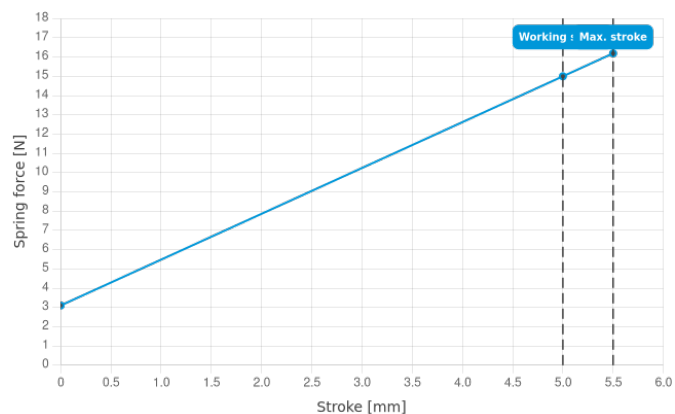

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Screw-in test probe



ingun.com

SCREW-IN TEST PROBE