



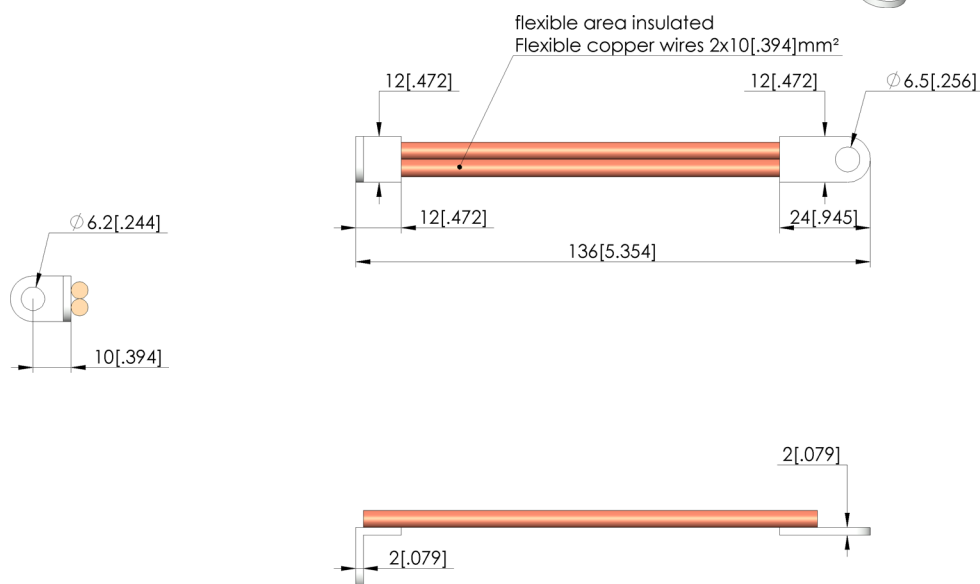

- Extremely low resistance cables made of pure copper wires with tin plated connectors
- Flexible copper cables to compensate the movement of the plunger
- Engineered to be exceptionally flexible, ensuring it exerts virtually no force on the continuous plunger probe
- Insulation made out of a transparent and thin silicone tube
- Maximum current capacity of 160A



General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-AWG08
SE-AWG08 plug with AWG08 cable
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Cable data

Cable length: 140 mm [5.51 in]
Cable type:

Connector data

Interface 1: AN-0005 cable eye Winkel - width 12mm, Bohrung 6.2mm
Interface gender 1: F signal conductor female / socket
Version 1: Right angle
Interface 2: AN-0006 cable eye gerade - width 12mm, Bohrung 6.5mm
Interface gender 2: F signal conductor female / socket
Version 2: Straight

Electrical data

Cable shielding: Simple

cable assembly

SE-AWG08-6-AN0005-100-AN0006-2

Item SE-AWG08-0003



ingun[®]

Partner for Future Technology

Test probes

Part no.	Designation	Version
BCP-693-0001	BCP-693 360 1100 A 35004-53	Battery contacting probe
BCP-693-0002	BCP-693 360 1000 A 28004-53	Battery contacting probe

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE