

Gas pressure spring cover struts

FB-GDS-400N-MAxxxx

Item 48730



GO TO PRODUCT

ingun[®]

Partner for Future Technology

- Safe, simple, power-assisted opening of the housing
- Assembly kit to replace pre-installed telescopic struts
- For use in standard and tall housings

Application

Two gas springs in the housing support the safe, simple, power-assisted opening of the housing and increase ease of use.



General data

Product group:	Functional units
Series:	FB-MAxxxx
Type:	Gas spring cover strut
Version:	MA xxxx
Accessory type:	Additional function
Scope of delivery:	2 x gas spring (GDF) incl. installation accessories
Weight:	1.96 kg [4.32 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes


Compatible with

Manual test fixtures (MA):

MA xx14

Technical data

Stroke:	120 mm [4.72 in]
Force:	400 N [1,438 ozf]
Length:	305 mm [12 in]

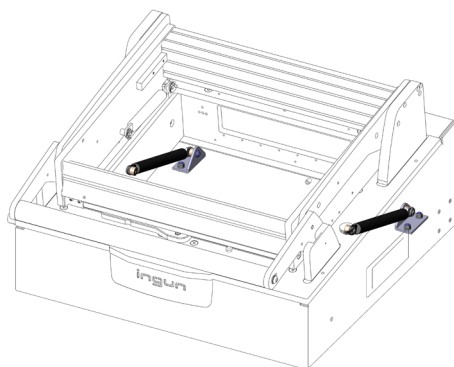

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com