

# Exchangeable kit ATS MA11/S-5

Item 45898-KIT



GO TO PRODUCT


**ingun**<sup>®</sup>  
Partner for Future Technology

- Quick, tool-free set-up, can be used without readjustment
- Available in standard, ESD, and RF versions, with or without internal interface
- Modularly configurable signal transmission with internal interfaces
- Pressure plate unit and probe plate unit can be screwed together with stacking screws to form a unit with protected probe field
- Robust, durable design
- Can be customised using functional units for individual configurations
- Detailed accompanying documents (e.g., customising guidelines)

#### Note:

For configurations with more than 300 test probes or a force greater than 500 N, the use of reinforcement bars (FB-VSL-KIT-...) is recommended.

## INGUN SELECTION

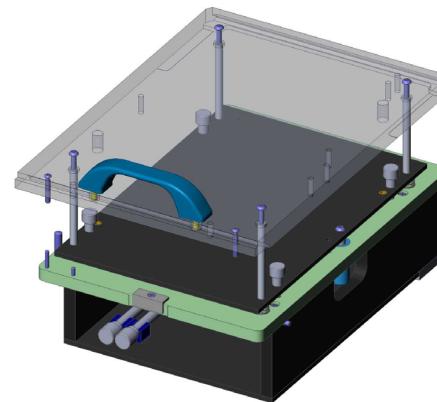

### General data

Product group:	ATS manual test fixture (MA)
Subseries:	ATS MAxx
Series:	ATS MA11
Version:	With interface
Scope of delivery:	Unassembled
For tandem fixtures:	Yes
Max. interface signals:	5
Interface blocks required:	Device under test (DUT) side
Max. internal interface blocks:	5
Internal interface:	Available
Dual-stage contacting:	<p>Yes, with compatible additional option</p>
Double-sided contact:	<p>Yes, with compatible additional option</p>
Weight:	3.5 kg [7.71 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
Low voltage:	Yes, with suitable additional option
RoHS-compliant:	Yes

### Compatible with

Manual test fixtures (MA): MA x211

### Technical data

Pushrod length:	60 mm [2.36 in]
Test probe installation height, top:	16 mm [.629 in]
Test probe installation height, bottom:	10.5 mm [.413 in]
Test probe installation height, dual-stage, bottom:	16 mm [.629 in]
Free space above PCB:	58 mm [2.28 in]
Useable area (WxD):	150 x 240 mm [5.9 x 9.44 in]
Outer dimensions (WxDxH):	210 x 313 x 201 mm [8.26 x 12.3 x 7.91 in]

# Exchangeable kit ATS MA11/S-5

Item 45898-KIT



GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology



## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
MA exchangeable kits



[ingun.com](http://ingun.com)

EXCHANGEABLE KITS