




GO TO PRODUCT

- Compatible test plug mount 115788, 115790, 115792, 115794
- Precise, low-wear contacting of RJ plug connectors
- Outstanding service life: up to 250,000 cycles under optimal conditions.
- Reliable data transmission
- Installation via optional floating mount
- Signal transmission via original connector plug

INGUN SELECTION

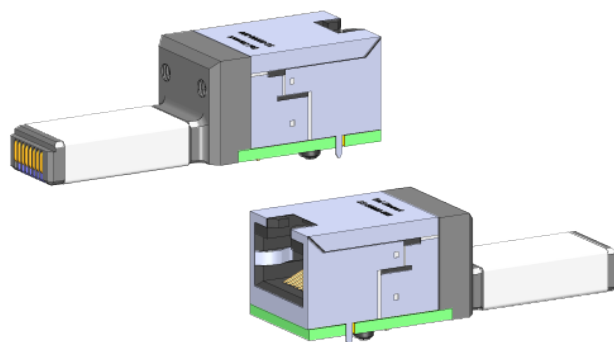

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-RJ
DUT / contact:	RJ-45
DUT interface gender :	F signal conductor female / socket
KS sub-series:	PSA-F16,5-RJxx
Width:	17 mm [.669 in]
Height:	17 mm [.669 in]
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	75 °C [167 °F]
RoHS-compliant:	Yes

Inner conductor data

Inner conductor maximum stroke:	1.5 mm [.059 in]
Number of inner conductor poles:	8

Electrical data

Max. data rate:	1 Gbit/s
-----------------	----------

Mechanical data

Total length:	53 mm [2.08 in]
---------------	-----------------

Test plug



PS-RJ45-M-008-M3-B

Item 55140



ingun[®]

Partner for Future Technology

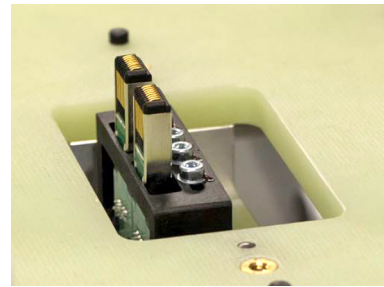

Test plug (part 55140)

Test plug mounting (part 55148)



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

