

Battery contacting probe

BCP-118 314 130 A 2202

Item BCP-118-0002




GO TO PRODUCT



ingun[®]

Partner for Future Technology

- Contacting solution for cylindrical cells
- Can be loaded with currents up to 18 A at $\Delta T \leq 20^\circ\text{K}$
- Low-Ohm probe with R_i typical: $< 10 \text{ m}\Omega$
- Developed for a range of applications including pre-charging, formation, measurement of internal resistance (IR), open-circuit voltage (OCV) assessment and end-of-life (EOL) testing



1:1

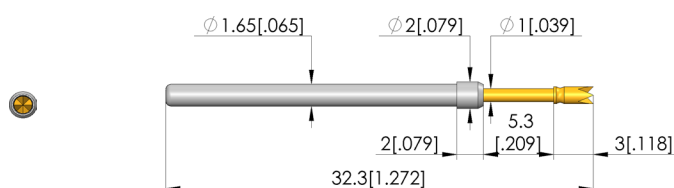

General data

Product group:	Battery Contacting
Sub-product group:	Standard BCP (press-in)
Series:	BCP-118
Grid:	2.54 mm [100 mil]
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-112
Min. temperature:	-100 °C [-148 °F]
Max. temperature:	200 °C [392 °F]
RoHS-compliant:	Yes

Tip style data

Tip style:	14 4-point crown, self-cleaning
Tip diameter:	1.3 mm [.051 in]
Tip style surface:	A gold
Tip style material:	3 CuBe

Electrical data

Current load capacity / rated current:	20 A
Typical resistance (R_i):	10 m Ω

Mechanical data

Total length:	32.3 mm [1.27 in]
Barrel diameter:	1.66 mm [.065 in]
Maximum stroke:	5.3 mm [.208 in]
Spring pre-load:	0.61 N [2.19 ozf]
Collar height:	02
Spring force at working stroke:	2.25 N [8.09 ozf]
Recommended working stroke:	4 mm [.157 in]

Battery contacting probe




BCP-118 314 130 A 2202

Item BCP-118-0002



ingun[®]

Partner for Future Technology

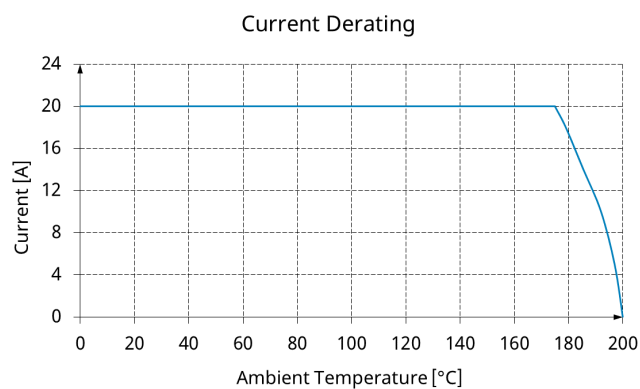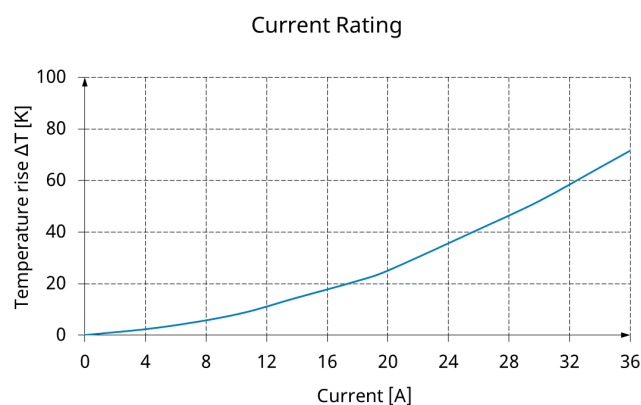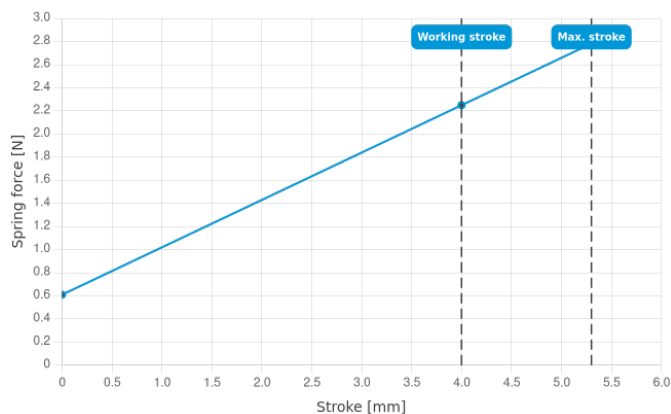

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

