

# Connector - multipole female STV-VG96abc-F-L-G04

Item 10422







GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology

- Trusted connector for multi-pole electric signal transmission
- Reliable connection and signal transmission
- Quick, easy, space-saving installation

## Application

VG multipoint connectors are used as pluggable connectors for multi-pole electrical signal transmission of low voltages within the scope of their specification.

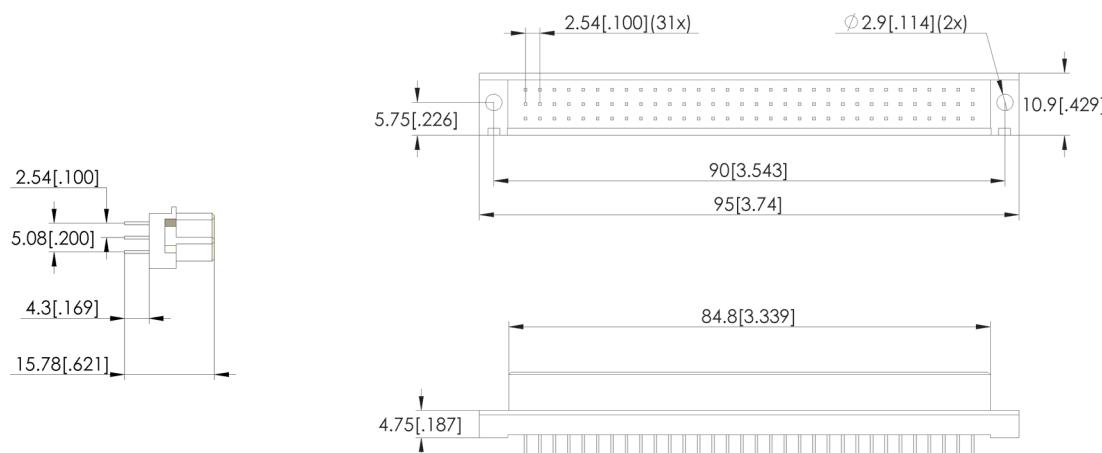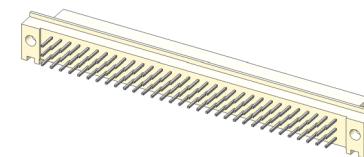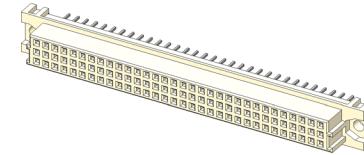

## General data

Product group:  
Series:  
Type:  
Version:  
Accessory type:  
Component assembly:  
Material:  
Width:  
Height:  
Weight:  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

VG-multipoint connectors  
VG  
Female socket connector  
C, straight with axial bore  
Customising accessories  
abc  
Contacts, gold-plated  
10.9 mm [.429 in]  
15.8 mm [.622 in]  
0.01 kg [.022 lbs]  
10 °C [50 °F]  
60 °C [140 °F]  
Yes

## Compatible with

Side approach mechanism:  
Accessories:

SAM-M-14-300N-268-145  
FB-VGL-96-ATSMAXXX

## Technical data

Connection:	Solder connection
Current rating:	2 A
Installation:	Bore D = 2.9 mm
Number of poles:	96
Installation grid:	2.54 mm [.1 in]
Length:	95 mm [3.74 in]
Post length:	4 mm [.157 in]
Outer dimensionS (WxDxH):	95 x 10.9 x 15.8 mm [3.74 x .429 x .622 in]

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB