

Locking unit - opened

FB-VER-O-ESO-MAxxxx

Item 43584



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Secure locking of open pressure frame

Application

To lock the open pressure frame in place, the pressure frame may only be closed under certain conditions.

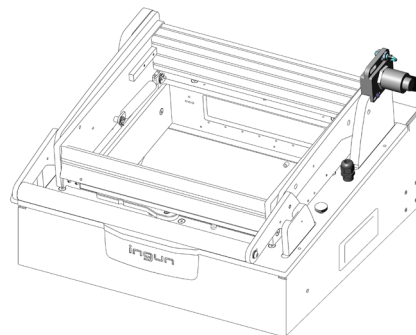

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Locking units

FB-MAxxxx

Compatible with

Manual test fixtures (MA):

Accessories:

MA xxxx

ATE VAxxxx

Technical data

Stroke:

6 mm [0.236 in]

Installation:

Thread M4

Max. voltage:

24 VDC (8 W)

Length:

68 mm [2.67 in]

Outer dimensionS (WxDxH):

70 x 68 x 59 mm [2.75 x 2.67 x 2.32 in]

Additional function

Unassembled

70 mm [2.75 in]


59 mm [2.32 in]

0.3 kg [0.661 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

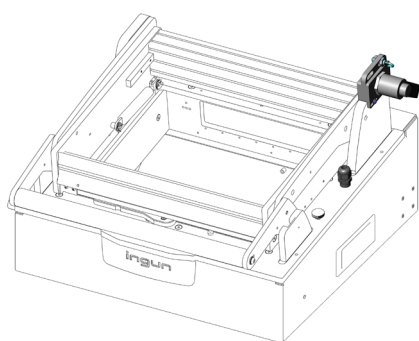

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com