

Receptacle

KS-100 47 G-18


Item KS-10047G-18



GO TO PRODUCT

ingun[®]

Partner for Future Technology

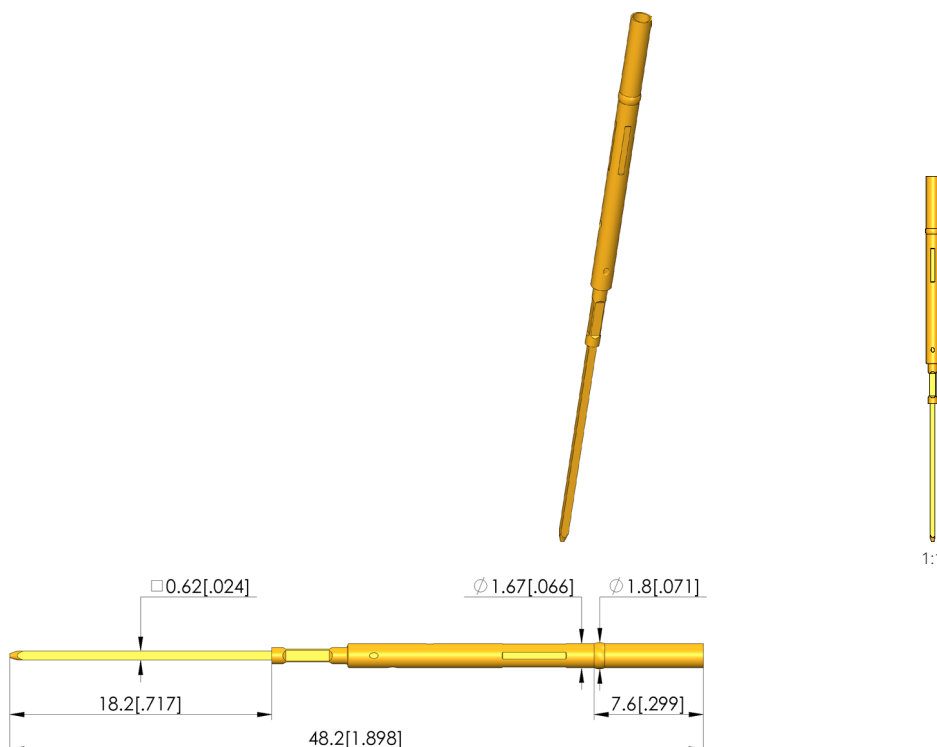

General data

Product group: Receptacles (KS)
 Series: KS-100
 Sub-series: KS-100 press-in version
 Type of receptacle connection: Wire-wrap
 Press ring: Yes
 Surface area: Gold
 Collar diameter: 1.85 mm [0.072 in]
 Collar height: 7.6 mm [0.299 in]
 Wire-wrap post length: 18.2 mm [0.716 in]
 Knurl: No
 Vacuum-tight: yes (< 1 ccm / min)
 RoHS-compliant: Yes

Mechanical data

Total length: 48.2 mm [1.89 in]
 Outer diameter: 1.67 mm [0.065 in]

Mounting hole

Mounting hole in CEM1: 1.68 – 1.69 mm [0.066 – .066 in]
 Mounting hole in FR4: 1.69 – 1.7 mm [0.066 – .066 in]
 Mounting hole with press ring in CEM1: 1.7 – 1.75 mm [0.066 – .068 in]
 Mounting hole with press ring in FR4: 1.7 – 1.75 mm [0.066 – .068 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Prices and delivery times on request.
 Technical changes reserved. 04/26_GB

Learn more about
 Test probes



ingun.com