

Pass/fail indication

FB-LED-D-MAxx09/11/13T

Item 115452



GO TO PRODUCT


ingun®

Partner for Future Technology

- Functional unit for individually configurable upgrade
- Signalling of the test results (pass/fail) on the test fixture
- Illumination of the test fixture interior
- Includes dimmer for adjusting the brightness
- Green: wavelength = 515-525 nm (light intensity = 800 mcd)
- Red: wavelength = 620-635 nm (light intensity = 300 mcd)

Application

The pass/fail LED display is used to signal the test results (pass/fail) on the test fixture by clearly illuminating the inside of the test fixture. The brightness can be adjusted using the integrated dimmer.

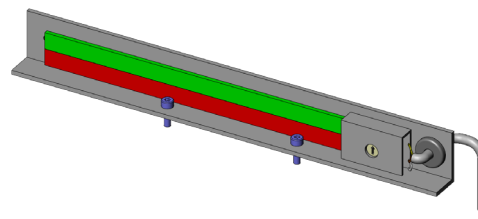

General data

Product group:	Functional units
Series:	FB-MAxxxx
Type:	Pass/fail LED display
Version:	Green/red incl. dimmer
Accessory type:	Additional function
Scope of delivery:	Partially assembled
Component assembly:	
Width:	210 mm [8.26 in]
Height:	25 mm [.984 in]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Exchangeable kits version:	No limitations
Manual test fixtures (MA):	MA xx13T

Technical data

Connection:	Cable (3x 0.14 mm ²)
Max. current:	.2 A
Max. voltage:	12 VDC
Number of poles:	3
Length:	15 mm [.59 in]
Cable length:	1,000 mm [39.3 in]
Outer dimensionS (WxDxH):	210 x 15 x 25 mm [8.26 x .59 x .984 in]

FUNCTIONAL UNIT

Pass/fail indication


FB-LED-D-MAxx09/11/13T

Item 115452



ingun[®]

Partner for Future Technology



INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



FUNCTIONAL UNIT

ingun.com