

Reinforcement set FB-VSL-KIT-KTE-ATSMA14

Item 46863




GO TO PRODUCT

ingun[®]
Partner for Future Technology

- To be installed under the probe plate (KTP)
- Recommended for customisations with more than 300 test probes or a force greater than 500 N
- The scope of delivery includes one strip with fixing material in each case

Application

For reinforcing the probe plate (KTP) to prevent deflection due to high forces resulting from customisation.

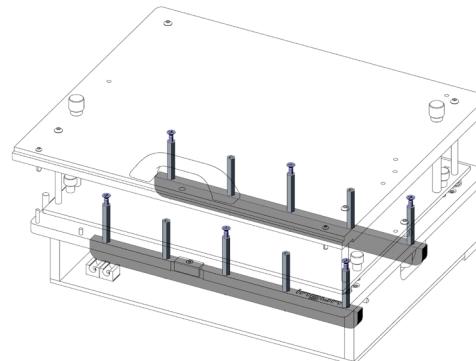

General data

Product group:	Functional units
Series:	FB-ATSMAXx
Type:	Reinforcement bar for probe plate (KTP)
Version:	Set including installation accessories
Accessory type:	Additional function
Scope of delivery:	1 x reinforcement bar
Material:	1.0037, galvanised
Width:	10 mm [.393 in]
Height:	60 mm [2.36 in]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Exchangeable kits version:
MA exchangeable kits (ATS MA):

No RF
ATS MA14

Technical data

Length: 540 mm [21.2 in]
Outer dimensions (WxDxH): 10 x 540 x 60 mm [.393 x 21.2 x 2.36 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
MA functional units

