

# Receptacle

## KS-100 47 G-13


Item KS-10047G-13




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology



1:1

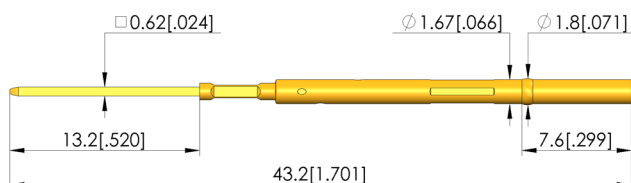

### General data

Product group: Receptacles (KS)  
 Series: KS-100  
 Sub-series: KS-100 press-in version  
 Type of receptacle connection: Wire-wrap  
 Press ring: Yes  
 Surface area: Gold  
 Collar diameter: 1.85 mm [.072 in]  
 Collar height: 7.6 mm [.299 in]  
 Wire-wrap post length: 13.2 mm [.519 in]  
 Knurl: No  
 Vacuum-tight: yes (< 1 ccm / min)  
 RoHS-compliant: Yes

### Mechanical data

Total length: 43.2 mm [1.7 in]  
 Outer diameter: 1.67 mm [.065 in]

### Mounting hole

Mounting hole in CEM1: 1.68 – 1.69 mm [.066 – .066 in]  
 Mounting hole in FR4: 1.69 – 1.7 mm [.066 – .066 in]  
 Mounting hole with press ring in CEM1: 1.7 – 1.75 mm [.066 – .068 in]  
 Mounting hole with press ring in FR4: 1.7 – 1.75 mm [.066 – .068 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
 78467, Constance, Germany  
 Phone +49 7531 8105-0  
 Customer hotline +49 7531 8105-888  
 Fax +49 7531 8105-65  
 info@ingun.com



Prices and delivery times on request.  
 Technical changes reserved. 04/26\_GB

Learn more about  
 Test probes



ingun.com