

# Test Probe

## GKS-005 206 396 A 2000

Item GKS-005-0005






GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. Spring forces.

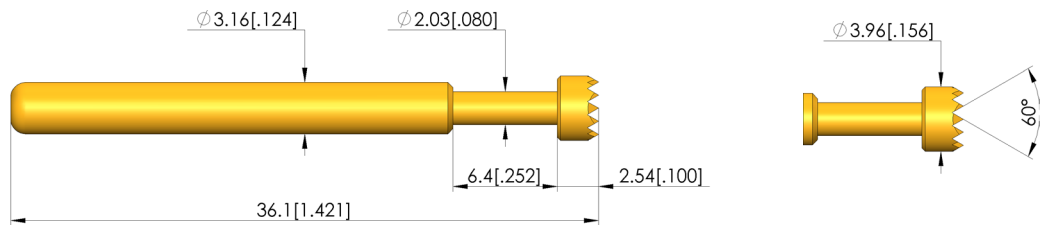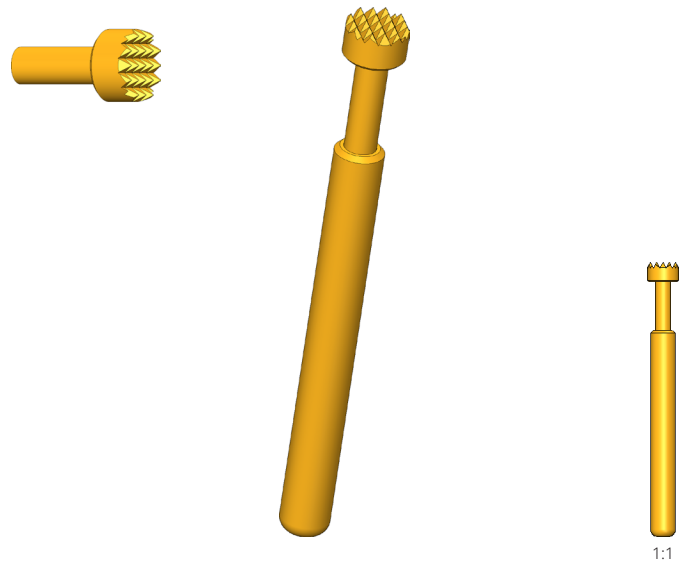

### General data

Product group:  
Sub-product group:  
Series:  
Grid:  
Contacting from:  
Magnetic:  
Installation type:  
Quick-exchange system:  
Adjustable installation height:  
Non-rotating:  
Compatible receptacle(s):  
Min. temperature:  
Max. temperature:  
RoHS-compliant:

ICT / FCT (in-circuit test and function test)  
Short/robust GKS  
GKS-005  
4.75 mm [187 mil]  
Post  
Yes  
Plug-in  
Yes  
No  
KS-005  
-40 °C [-40 °F]  
80 °C [176 °F]  
Yes

### Tip style data

Tip style: 06 serrated  
Tip diameter: 3.96 mm [.155 in]  
Tip style surface: A gold  
Tip style material: 2 steel

### Electrical data

Current load capacity / rated current: 6 A  
Typical resistance (Ri): 20 mOhm

### Mechanical data

Total length: 36.1 mm [1.42 in]  
Maximum stroke: 6.35 mm [.25 in]  
Spring pre-load: 0.95 N [3.41 ozf]  
Collar height: 00  
Spring force at working stroke: 2 N [7.19 ozf]  
Recommended working stroke: 4.4 mm [.173 in]

# Test Probe

## GKS-005 206 396 A 2000


Item GKS-005-0005



GO TO PRODUCT

# ingun®

Partner for Future Technology

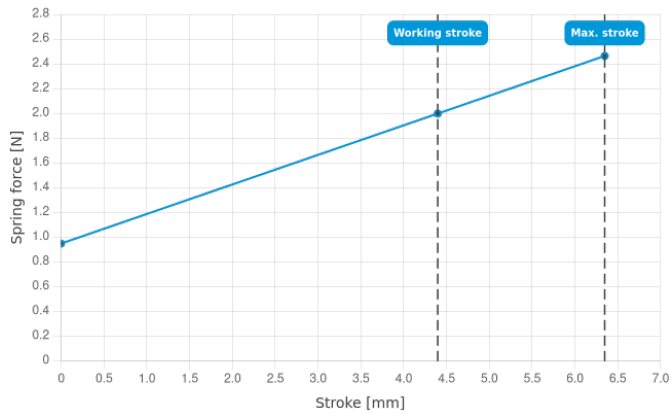

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 04/26\_GB

Learn more about  
ICT/FCT Test probes



ingun.com

ICT/FCT TEST PROBES