

Pneumatic magnet valve PMV-M05/2-QS4-24V-SET

Item 42702



GO TO PRODUCT

ingun[®]
Partner for Future Technology



- Precise control of compressed air
- Quick reaction times thanks to combination of electronic activation and mechanical movement
- Reliable and durable, even under harsh conditions.
- Compact design, ideal for use in limited spaces

Application

Pneumatic solenoid valves are used to control pneumatic drives in order to regulate or stop the flow of the required compressed air.

Function

Pneumatic solenoid valves consist of a solenoid coil system and a valve mechanism. Applying voltage to the solenoid coil generates a magnetic field that actuates the valve mechanism. This controls the air flow.

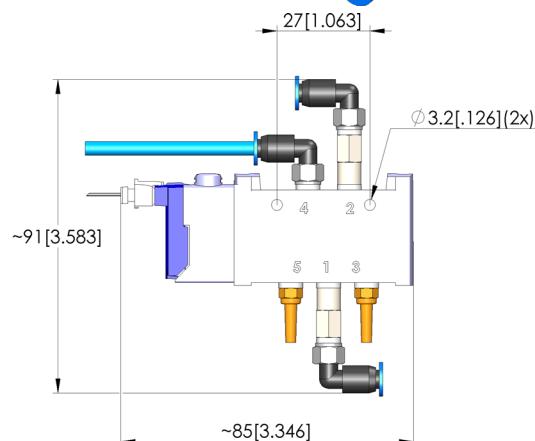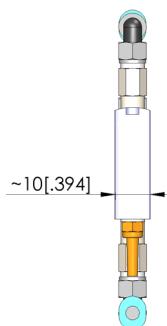

General data

Product group:

Pneumatic accessory

FB-SOP

Series:

PMV

Type:

Magnet valve, set

QS-4

Version:

5/2 monostable, open

24 VDC

Accessory type:

Customising accessories

5

Scope of delivery:

Incl. connector accessories

Material:

Aluminium alloy

Width:

10 mm [0.393 in]

Height:

91 mm [3.58 in]

Weight:

0.04 kg [0.088 lbs]

Min. temperature:

-5 °C [23 °F]

Bore D = 3.2 mm

Max. temperature:

60 °C [140 °F]

24 VDC

RoHS-compliant:

Yes

5

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com

