

Pressure frame unit NDH-535-480-VL-ESD


Item 35476



GO TO PRODUCT

ingun[®]

Partner for Future Technology

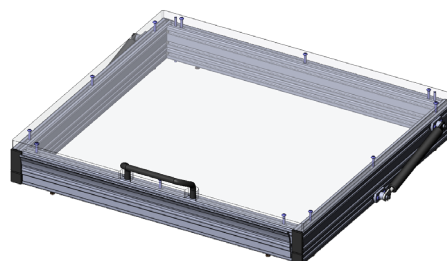

General data

Product group:
Series:
Type:
Version:
Accessory type:
Width:
Height:
Min. temperature:
Max. temperature:

Mounted units
NDH-VAxxxx
ESD
Locking strip
Additional function
578 mm [22.7 in]
100 mm [3.93 in]
10 °C [50 °F]
60 °C [140 °F]

Compatible with

Exchangeable kits version:

No limitations

Technical data

Pushrod length: 55.6 mm [2.18 in]
Free space above PCB: 54 mm [2.12 in]
Pressure frame opening angle: 85 °
Bearing distance: 495 x 440 x 60 mm [19.4 x 17.3 x 2.36 in]
Useable area (WxD): 455 x 400 mm [17.9 x 15.7 in]
Length: 513 mm [20.1 in]
Outer dimensionS (WxDxH): 578 x 513 x 100 mm [22.7 x 20.1 x 3.93 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test fixture kits

