




GO TO PRODUCT

- Parallel closing drive mechanism without mounting plate, without internal interface
- High contact force
- Freely configurable signal transmission
- Quick, easy, precise installation
- Can be used for various applications

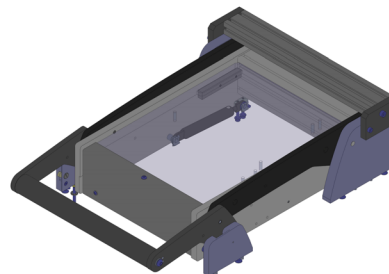

General data

Product group:
Main series:
Subseries:
Series:
Size:
Test fixture type:
Contact stroke generation:
Max. contact force:
Approx. parallel contact stroke:
Min. temperature:
Max. temperature:
RoHS-compliant:

Manual drive unit
ATE VAxxxx
ATE VA2xxx
ATE VA20xx
2040 small
Without mounting plate
Manual
2,000 N [7,193 ozf]
15 mm [.59 in]
10 °C [50 °F]
60 °C [140 °F]
Yes

Technical data

Pushrod length: 60 mm [2.36 in]
Test probe installation height, top: 16 mm [.629 in]
Free space above PCB: 58 mm [2.28 in]
Pressure frame closing force: 120 N [431 ozf]
Pressure frame opening angle: 69 °
Useable area, standard (WxD): 180 x 260 mm [7.08 x 10.2 in]
Outer dimensions, closed (WxDxH): 292 x 454 x 101 mm [11.4 x 17.8 x 3.97 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test fixture kits

