



GO TO PRODUCT

- RF absorber for radio-frequency exchangeable kit for setting up an interference-free, internal radio network
- Reliable prevention of unwanted reflections of radio signals within the radio-frequency chamber

### Application


RF absorbers are used to cover the inner walls of the radio-frequency exchangeable kit in order to create an interference-free radio network and prevent reflections of radio signals within the RF chamber. The RF absorber is selected based on the frequency used and the size of the exchangeable kit.

#### Note:

Refer to the customising guidelines document INFO 4585 to ensure correct installation of the RF absorber.

#### Note:

RF absorbers have a conductive (light grey) and a non-conductive (anthracite) surface. During installation, ensure that the light grey side faces the RF DUT and the anthracite side faces the RF chamber.

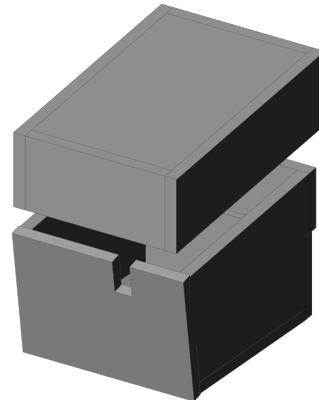

#### Note:

Exchangeable kits customised with RF absorbers, the usable areas and the maximum permitted component height of the PCB are reduced.

### General data

Product group:	RF accessories
Series:	HF-A
Type:	RF absorber set
Version:	RF exchangeable kit ATS MA11/HF
Accessory type:	Customising accessories
Scope of delivery:	Unassembled
Material:	RF plastic foam
Weight:	0.18 kg [.396 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

### Compatible with

Exchangeable kits version:	HF, ESD
MA exchangeable kits (ATS MA):	ATS MA11(/S-5)/HF/AL/ESD

### Technical data

Free space above PCB:	49 mm [1.92 in]
Frequency up to:	7.5 GHz
Useable area (WxD):	110 x 150 mm [4.33 x 5.9 in]
Outer dimensionS (WxDxH):	148 x 222 x 195 mm [5.82 x 8.74 x 7.67 in]

RF absorber mat


**HF-A-7,5GHz-ATSMA11/HF/AL**

Item 112702



**ingun**<sup>®</sup>

Partner for Future Technology

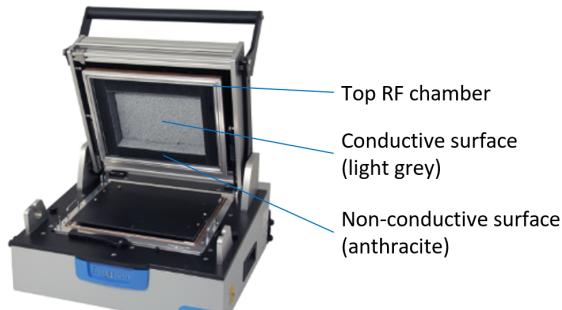

#### Radio-frequency exchangeable kits

Part no.	Designation	Version
154011	ATS MA11/HF/AL/ESD	Radio-frequency exchangeable kit without internal interface
154111	ATS MA11/S-5/HF/AL/ESD	Radio-frequency exchangeable kit with internal interface

#### **INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com

