


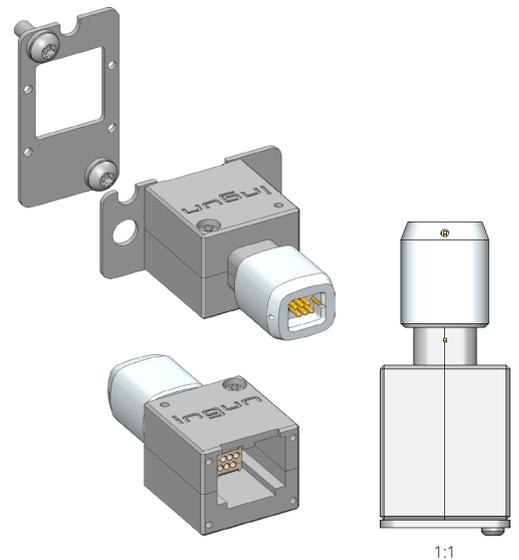




- Applications mainly for future technologies in automotive sector (e.g. camera devices, info-tainment, telematics, navigation, autonomous driving)
- For HS Autolink II differential connector
- Consistent RF signal and data transmission
- Protected signal inner conductor due to protruding outer housing
- Long service life due to low-wear interior design and optimized abrasion resistance
- Connection of the interface only via original cable HS Autolink II or INGUN cable adapter, 6-pin or 12-pin
- Optional floating system can be used
- Test plugs with various mounting brackets for side-by-side or stacked mounting

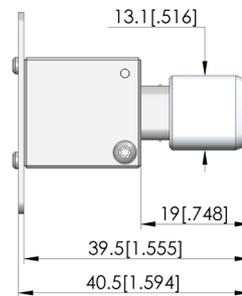

1:1

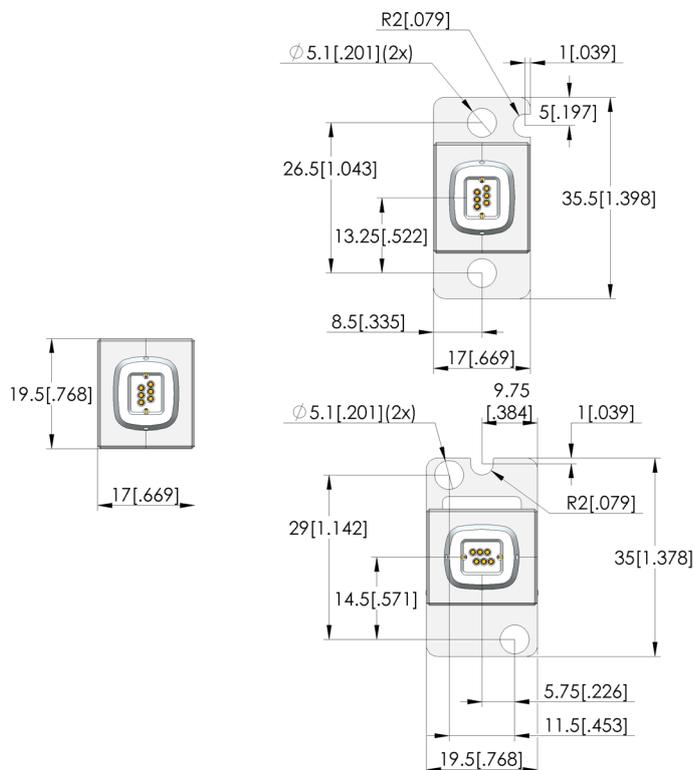

- M3x8 T10 (2x)
- M1.6x4 T5 (2x)
- reducing washer (2x)

PS-HSAL2-S-M-006-G5-B-01

PS-HSAL2-S-M-006-G5-B-01

Item 116019



GO TO PRODUCT

ingun[®]

Partner for Future Technology

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-HSAL
Grid:	20 mm [787 mil]
DUT / contact:	HSAutolink , sealed
DUT interface gender :	F signal conductor female / socket
Width:	19.5 mm [.767 in]
Height:	17 mm [.669 in]
Min. temperature:	0 °C [32 °F]
Max. temperature:	50 °C [122 °F]
RoHS-compliant:	Yes

Inner conductor data

Number of inner conductors:	6
Inner conductor maximum stroke:	2.5 mm [.098 in]
Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	6

Electrical data

Max. data rate:	5 Gbit/s
-----------------	----------

Mechanical data

Total length:	41.5 mm [1.63 in]
---------------	-------------------

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test probes

