

ESD discharge probe FB-ALS-ATSMAXx/xxx

Item 41899




GO TO PRODUCT

ingun
Partner for Future Technology

- Reliable dissipation of electrostatic discharges that occur as a result of potential differences
- Quick, easy installation

Application

The ESD discharge contact is used for the reliable discharge of any electrostatic discharges that may occur as a result of potential differences. It is installed in the probe plate and the moving plate.

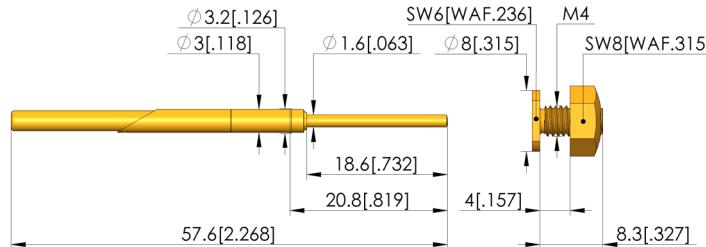

General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Component assembly:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Functional units

FB-ATSMAXx

ESD discharge contact

Single-stage contacting

Customising accessories

Unassembled

GKS-114-0015

0.01 kg [.022 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

MA exchangeable kits (ATS MA):

ATS MAXx/ESD

Technical data

Stroke:

16 mm [.629 in]

Length:

57.6 mm [2.26 in]

Diameter:

3 mm [.118 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
MA functional units



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

