




GO TO PRODUCT

- Long-stroke test probe for implementing combined ICT and FCT in a dual-stage fixture
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.
- Used for setting the optimum stroke conditions in the test fixture, various installation heights can be achieved by combining test probes and receptacles

**Note:**

Receptacles in the series KS-100 are used for the GKS-135 test probes series.

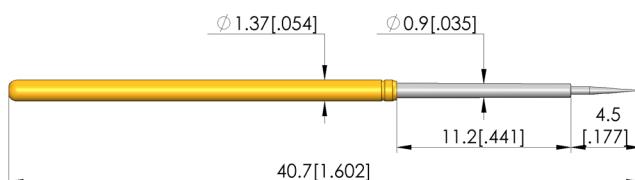**General data**

Product group:	ICT / FCT (in-circuit test and function test
Sub-product group:	Long stroke GKS
Series:	GKS-135
Grid:	2.54 mm [100 mil]
Contacting from:	Pad
Magnetic:	Yes
Installation type:	Plug-in
Quick-exchange system:	Yes
Adjustable installation height:	No
Non-rotating:	No
Compatible receptacle(s):	KS-100
Min. temperature:	-40 °C [-40 °F]
Max. temperature:	80 °C [176 °F]
RoHS-compliant:	Yes

**Tip style data**

Tip style:	09 flexi-needle, self-cleaning
Tip diameter:	0.5 mm [.019 in]
Tip style surface:	N nickel
Tip style material:	2 steel

**Electrical data**

Current load capacity / rated current:	5 A
Typical resistance (R <sub>i</sub> ):	30 mOhm

**Mechanical data**

Total length:	40.7 mm [1.6 in]
Barrel diameter:	1.37 mm [.053 in]
Maximum stroke:	11 mm [.433 in]
Spring pre-load:	0.21 N [.755 ozf]
Collar height:	00
Spring force at working stroke:	2 N [7.19 ozf]
Recommended working stroke:	9.3 mm [.366 in]


# Test Probe GKS-135 209 050 N 2000

Item GKS-135-0006



GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology

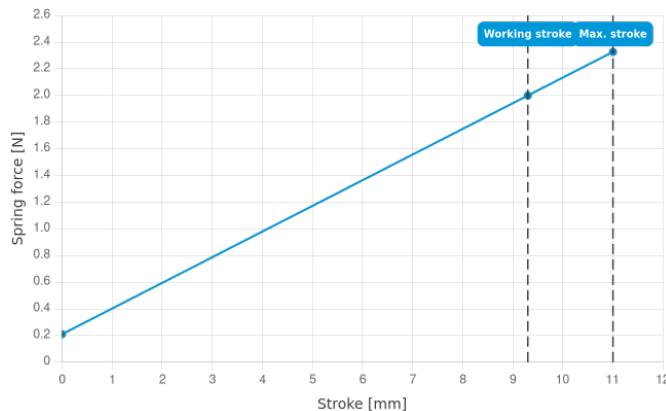

## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
ICT/FCT Test probes



[ingun.com](http://ingun.com)