

Contact terminal

KT-S-039 67 22

Item KT-S039-0003




GO TO PRODUCT

ingun®

Partner for Future Technology

- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

NEW

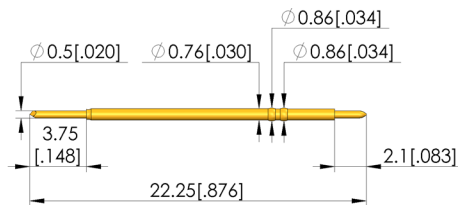

General data

| | |
|--------------------------------------|------------------------|
| Product group: | Contact terminals (KT) |
| Series: | KT-S039 |
| Sub-series: | KT-S039 standard |
| Grid: | 1 mm [39.3 mil] |
| Type of contact terminal connection: | Wireless |
| Magnetic: | Yes |
| Installation type: | Press-in |
| Quick-exchange system: | No |
| Surface area: | A gold |
| Knurl: | No |
| RoHS-compliant: | Yes |

Tip style data

Tip diameter: 0.49 mm [.019 in]

Mechanical data

Total length: 22.2 mm [.875 in]
Shaft diameter: 0.76 mm [.029 in]
Latching lug: No

Mounting hole

Mounting hole in CEM1: 0.8 – 0.82 mm [.031 – .032 in]
Mounting hole in FR4: 0.8 – 0.82 mm [.031 – .032 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes

