

# Test Probe VF4-203 300 A 25

Item VF4-0039





GO TO PRODUCT

**ingun**<sup>®</sup>




Partner for Future Technology

## Verrastprüfung

Zur Überprüfung der korrekten Verrastung des Kontaktterminals im Steckergehäuse



1:1

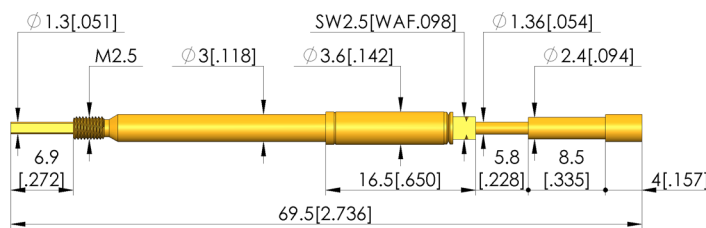

### General data

|                                 |                                  |
|---------------------------------|----------------------------------|
| Screw-in torque max.:           | 5 cNm [.442 lbf-in]              |
| Product group:                  | Push-back probes                 |
| Sub-product group:              | Push-back probes                 |
| Series:                         | VF4                              |
| Grid:                           | 4 mm [157 mil]                   |
| Contacting from:                | Post                             |
| Magnetic:                       | Yes                              |
| Installation type:              | Screw-in                         |
| Quick-exchange system:          | Yes                              |
| Adjustable installation height: | No                               |
| Non-rotating:                   | Yes                              |
| Continuous plunger:             | $\phi 1,3 \times 0,8 \times 6,9$ |
| Screw-in torque:                | 3 – 5 cNm [.265 – .442 lbf-in]   |
| Compatible receptacle(s):       | KS-VF4                           |
| Min. temperature:               | -40 °C [-40 °F]                  |
| Max. temperature:               | 80 °C [176 °F]                   |
| RoHS-compliant:                 | Yes                              |

### Tip style data

|                     |                 |
|---------------------|-----------------|
| Tip style:          | 03 inverse cone |
| Tip diameter:       | 3 mm [.118 in]  |
| Tip style surface:  | A gold          |
| Tip style material: | 2 steel         |

### Electrical data

|                                        |         |
|----------------------------------------|---------|
| Current load capacity / rated current: | 8 A     |
| Typical resistance (Ri):               | 30 mOhm |

### Mechanical data

|                                 |                   |
|---------------------------------|-------------------|
| Total length:                   | 69.5 mm [2.73 in] |
| Barrel diameter:                | 3 mm [.118 in]    |
| Maximum stroke:                 | 5.5 mm [.216 in]  |
| Spring pre-load:                | 7 N [25.1 ozf]    |
| Spring force at working stroke: | 25 N [89.9 ozf]   |
| Recommended working stroke:     | 5 mm [.196 in]    |

SCREW-IN TEST PROBE

# Test Probe


## VF4-203 300 A 25

Item VF4-0039



**ingun**<sup>®</sup>

Partner for Future Technology

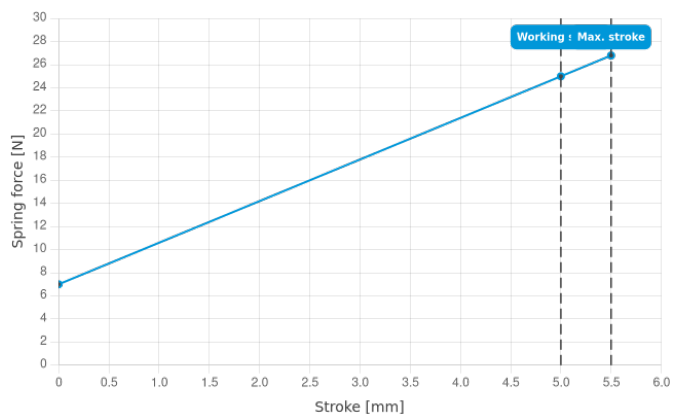

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

Learn more about  
Screw-in test probe



SCREW-IN TEST PROBE

ingun.com