

# Connector - plug pole clamp

## STV-PK4-M4-SW

Item 3645



GO TO PRODUCT


**ingun**<sup>®</sup>

Partner for Future Technology


- Pole terminal with claw edge, captive insulating head and insulating rings
- Threaded bolt with 4 mm diameter made of nickel-plated brass, with 2 mm diameter cross hole

### Application

For insulated, non-rotating installation in the interface block and in device frame and control panels up to 2 mm wall thickness.

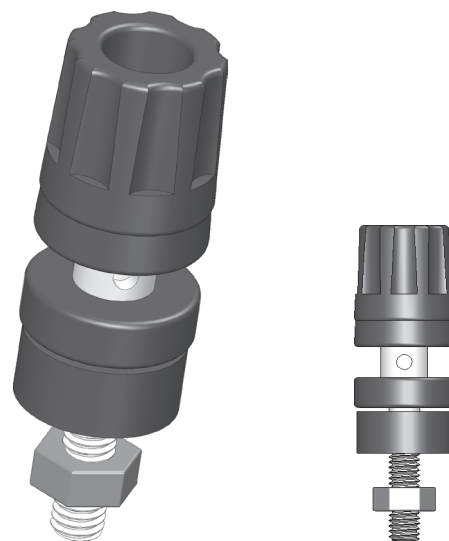

1:1



### General data

Product group:

Series:

Type:

Version:

Accessory type:

Component assembly:

Material:

Colour:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Electric accessory  
STV  
Pole clamp  
Socket D4, radial bore D2  
Customising accessories

Brass, nickel-plated

Black

0.01 kg [0.022 lbs]

-25 °C [-13 °F]

100 °C [212 °F]

Yes

### Compatible with

Interface blocks (SB):

### Technical data

Connection:

Max. current:

Installation:

Max. voltage:

Number of poles:

Length:

Diameter:

M4 threaded connection

35 A

Thread M4

30 VAC / 60 VDC

1

41.5 mm [1.63 in]

4 mm [.157 in]

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB