

Test plug

PS-USB-A-004-F9,6

Item 21071




ingun[®]

Partner for Future Technology

- Precise, low-wear contacting of USB plug connectors
- Outstanding service life
- Reliable data transmission
- Signal transmission via original connector plug or solder connection
- Optional spring elements (112863: set of 2) can compensate for tolerances of ± 0.4 mm and positioning inaccuracies.

INGUN SELECTION

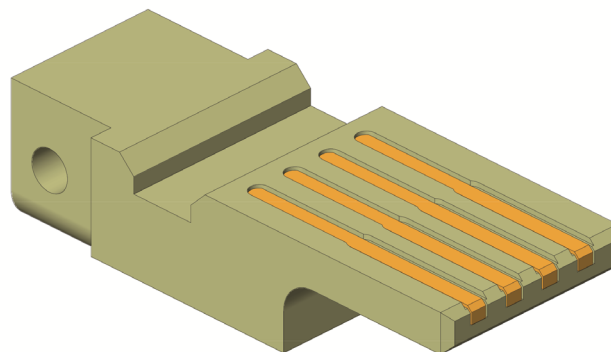

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-USB
Grid:	14.5 mm [570 mil]
DUT / contact:	USB3.0A
DUT interface gender :	F signal conductor female / socket
KS sub-series:	PSA-F9,6
Width:	12 mm [.472 in]
Height:	8.4 mm [.33 in]
Min. temperature:	-80 °C [-112 °F]
Max. temperature:	150 °C [302 °F]
RoHS-compliant:	Yes

Inner conductor data

Number of inner conductor poles:	4
----------------------------------	---

Mechanical data

Total length:	32 mm [1.25 in]
---------------	-----------------

Test plug


PS-USB-A-004-F9,6

Item 21071



ingun[®]

Partner for Future Technology

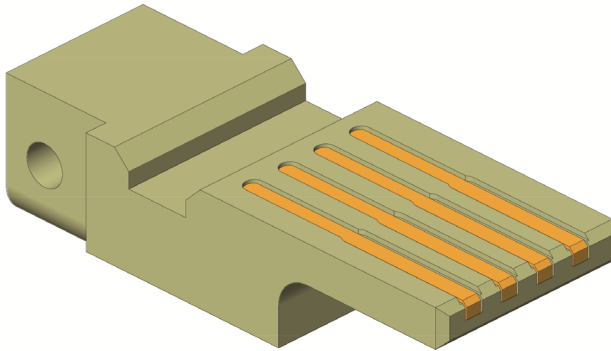

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes

