

Button activator TAB-M-10-6-LK

Item 57584



GO TO PRODUCT

ingun[®]
Partner for Future Technology


- Reliable actuation of push-buttons and spring-loaded switches
- Quick, easy, space-saving installation
- Freely-adjustable positioning thanks to the threaded connection
- Not air-tight

Application

Button activators (TAB) can be used for space-saving actuation of push-buttons and spring-loaded switches on the PCB during testing. They are actuated manually.

Delivery

Delivered partially assembled, tip is enclosed.

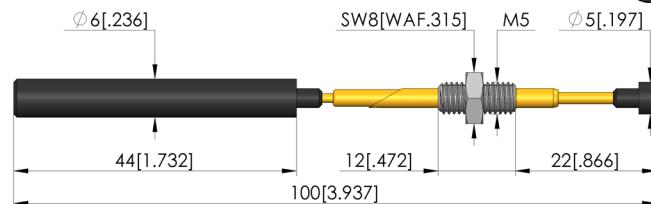

Maximum stroke



General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Button activator

TAB

Button actuator (TAB), manual

100 long

Customising accessories

Partially assembled, tip enclosed

9.5 mm [.374 in]

0.01 kg [.022 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Exchangeable kits version:

No RF

MA 2012

ATS MAXX

ATS PAZXX

Yes

Manual test fixtures (MA):

MA exchangeable kits (ATS MA):

PA exchangeable kits (ATS PA):

For dual-stage contacting:

Technical data

Stroke:

8 mm [.314 in]

6 mm [.236 in]

Thread M5

10 mm [.393 in]

100 mm [3.93 in]

Tip diameter:

Installation:

Installation grid:

Length:

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com

