

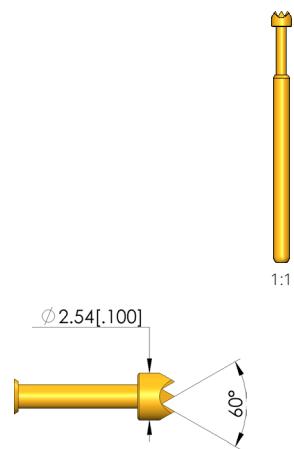
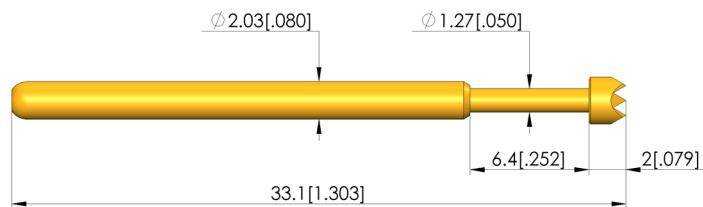




GO TO PRODUCT

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.

INGUN SELECTION

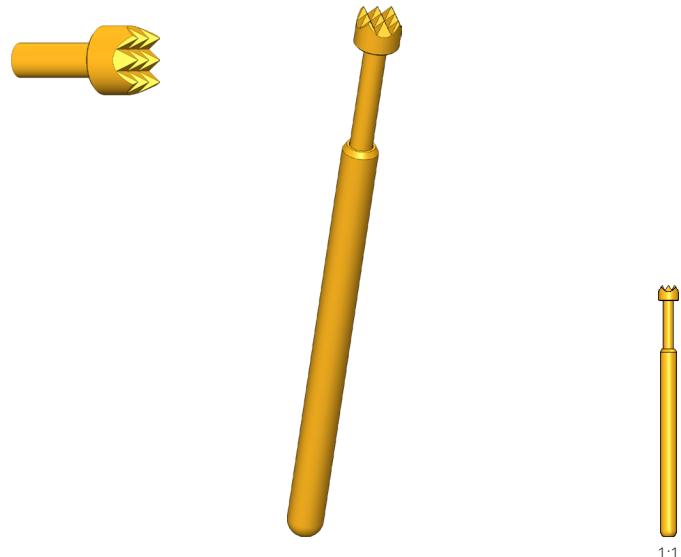

General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Short/robust GKS
 Series: GKS-003
 Grid: 3.18 mm [125 mil]
 Contacting from: Post
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-003
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)

Short/robust GKS

Tip style:

06 serrated

2.54 mm [.1 in]

A gold

2 steel

Tip diameter:

Tip style surface:

Tip style material:

Electrical data

5 A

20 mOhm

Current load capacity / rated current:

Typical resistance (R_i):

Mechanical data

33.1 mm [1.3 in]

2.03 mm [.079 in]

6.35 mm [.25 in]

0.85 N [3.05 ozf]

00

2 N [7.19 ozf]

4.4 mm [.173 in]

Total length:

Barrel diameter:

Maximum stroke:

Spring pre-load:

Collar height:

Spring force at working stroke:

Recommended working stroke:


Test Probe GKS-003 206 254 A 2000

Item GKS-003-0004



GO TO PRODUCT

ingun[®]
Partner for Future Technology

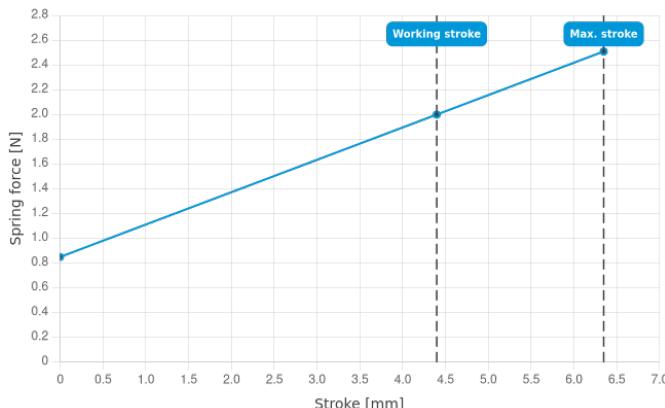

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

2 / 2

Learn more about
ICT/FCT Test probes



ingun.com