

Connector - multipole female

STV-VG64ac-F-L-G04

Item 4865





ingun[®]

Partner for Future Technology

- Trusted connector for multi-pole electric signal transmission
- Reliable connection and signal transmission
- Quick, easy, space-saving installation

Application

VG multipoint connectors are used as pluggable connectors for multi-pole electrical signal transmission of low voltages within the scope of their specification.

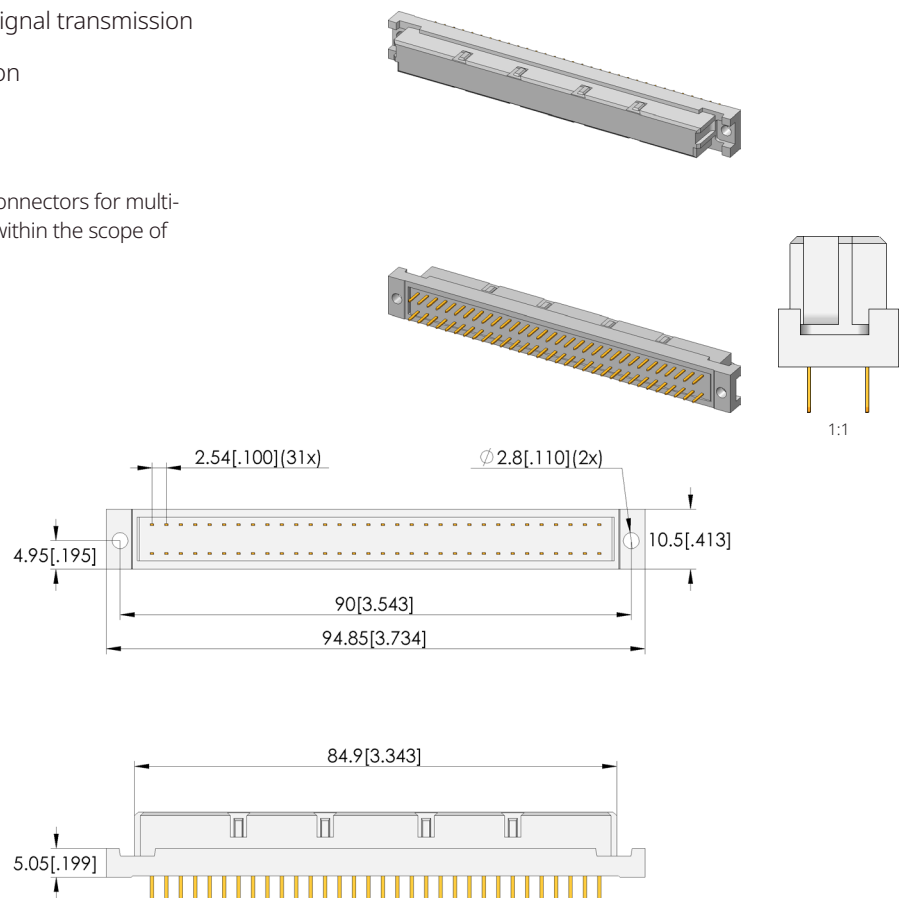

General data

Product group:
Series:
Type:
Version:
Accessory type:
Component assembly:
Material:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

VG-multipoint connectors
VG
Female socket connector
C, straight with axial bore
Customising accessories
ac
Contacts, gold-plated
10.6 mm [.417 in]
15.6 mm [.614 in]
0.01 kg [.022 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Side approach mechanism:
Accessories:

SAM-M-14-300N-268-145
FB-VGL-64-ATSMAXxx

Technical data

Connection:
Current rating:
Installation:
Number of poles:
Installation grid:
Length:
Post length:
Outer dimensionS (WxDxH):

Solder connection
2 A
Bore D = 2.8 mm
64
2.54 mm [.1 in]
95 mm [3.74 in]
4 mm [.157 in]
95 x 10.6 x 15.6 mm [3.74 x .417 x .614 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB