




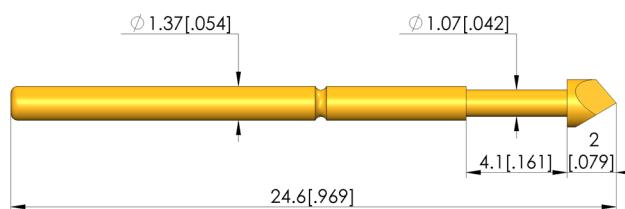

GO TO PRODUCT

- Robust, compact design for harsh ICT/FCT applications with limited space
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.



General data

Product group: ICT / FCT (in-circuit test and function test)
 Sub-product group: Short/robust GKS
 Series: GKS-002
 Grid: 2.54 mm [100 mil]
 Contacting from: Via
 Magnetic: Yes
 Installation type: Plug-in
 Quick-exchange system: Yes
 Adjustable installation height: No
 Non-rotating: No
 Compatible receptacle(s): KS-002
 Min. temperature: -40 °C [-40 °F]
 Max. temperature: 80 °C [176 °F]
 RoHS-compliant: Yes

ICT / FCT (in-circuit test and function test)

Short/robust GKS

GKS-002

2.54 mm [100 mil]

Via

Yes

Plug-in

Yes

No

No

KS-002

-40 °C [-40 °F]

80 °C [176 °F]

Yes

Tip style data

Tip style: 07 90° 3-edged chisel, self-cleaning
 Tip diameter: 1.91 mm [.075 in]
 Tip style surface: A gold
 Tip style material: 2 steel

Electrical data

Current load capacity / rated current: 5 A
 Typical resistance (R_i): 20 mOhm

Mechanical data

Total length: 24.6 mm [.968 in]
 Barrel diameter: 1.37 mm [.053 in]
 Maximum stroke: 4.1 mm [.161 in]
 Spring pre-load: 1.32 N [4.74 ozf]
 Collar height: 00
 Spring force at working stroke: 2.8 N [10 ozf]
 Recommended working stroke: 2.7 mm [.106 in]


Test Probe GKS-002 207 191 A 2800

Item GKS-002-0033



GO TO PRODUCT

ingun[®]
Partner for Future Technology

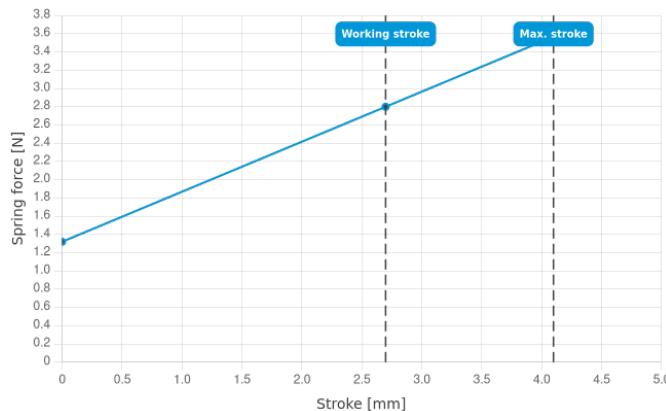

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

2 / 2

Learn more about
ICT/FCT Test probes



ingun.com