

# Dual-stage locking unit motor

## FB-2VM-MOT-MAxxxx

Item 112801




GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

- Upgrade kits to make operation easier, increase the testing reliability, and to reduce handling times
- Available for manual test fixtures and exchangeable kits
- Wide range of varying functions

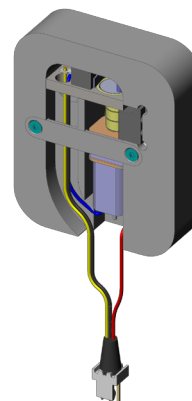

### General data

|                    |                                               |
|--------------------|-----------------------------------------------|
| Product group:     | Functional units                              |
| Series:            | FB-MAxxxx                                     |
| Type:              | Upgrade kit to replace telescopic cover strut |
| Version:           | Dual-stage locking unit motor                 |
| Accessory type:    | Additional function                           |
| Scope of delivery: | Pre-assembled                                 |
| Width:             | 15 mm [.59 in]                                |
| Height:            | 60 mm [2.36 in]                               |
| Weight:            | 0.06 kg [.132 lbs]                            |
| Min. temperature:  | 10 °C [50 °F]                                 |
| Max. temperature:  | 60 °C [140 °F]                                |
| RoHS-compliant:    | Yes                                           |

### Compatible with

|              |                  |
|--------------|------------------|
| Accessories: | FB-2VM-SO-MAxxxx |
|--------------|------------------|

### Technical data

|                           |                                        |
|---------------------------|----------------------------------------|
| Connection:               | Plug connector                         |
| Max. voltage:             | 36 VDC                                 |
| Number of poles:          | 3                                      |
| Length:                   | 50 mm [1.96 in]                        |
| Cable length:             | 50 mm [1.96 in]                        |
| Outer dimensionS (WxDxH): | 15 x 50 x 60 mm [.59 x 1.96 x 2.36 in] |

### INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 11/25\_GB

Learn more about  
MA functional units



FUNCTIONAL UNIT

ingun.com