




GO TO PRODUCT

- Secure hold of the test fixture on the base plate of the Pylon receiver
- Protection against lifting of the front of the test fixture during locking
- The test fixture must be equipped with the fixture fixing mechanism.

Application

The functional unit is used to securely fix the test fixture to the base plate of the Pylon receiver and serves as protection against the front of the test fixture lifting while locked.

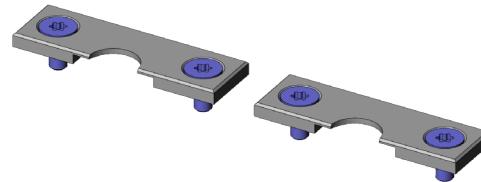

General data

Product group:	Locking units
Series:	FB-RC
Type:	Receiver/test fixture fixing mechanism
Version:	RECEIVER
Accessory type:	Additional function
Scope of delivery:	Must be installed upon delivery, installation accessories included
Material:	1.2842
Width:	15 mm [.59 in]
Height:	3.3 mm [.129 in]
Weight:	0.04 kg [.088 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

Compatible with

Accessories:	Pylon-WSO-ASYS
--------------	----------------

Technical data

Installation:	Thread M4
Length:	50 mm [1.96 in]
Outer dimensions (WxDxH):	50 x 15 x 3.3 mm [1.96 x .59 x .129 in]

FB-VER-F-M-RC

FB-VER-F-M-RC



Item 116130



GO TO PRODUCT

ingun[®]

Partner for Future Technology

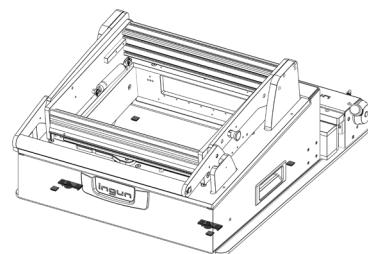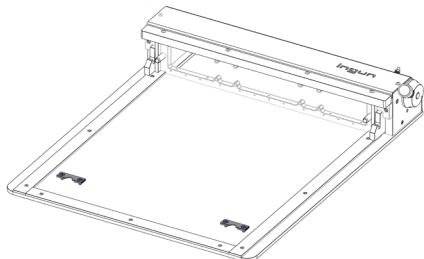

Accessories

Part no.	Designation	Version
116150	FB-VER-F-M-MA/VA	Fixation test fixture

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Learn more about
Test fixture kits

