




GO TO PRODUCT

- For installation on the pressure frame plate (NHP)
- Recommended for customisations with more than 300 test probes or a force greater than 500 N
- The scope of delivery includes one strip with fixing material in each case

#### Application

For reinforcing the pressure frame plate (NHP) to prevent deflection due to high forces resulting from customisation.

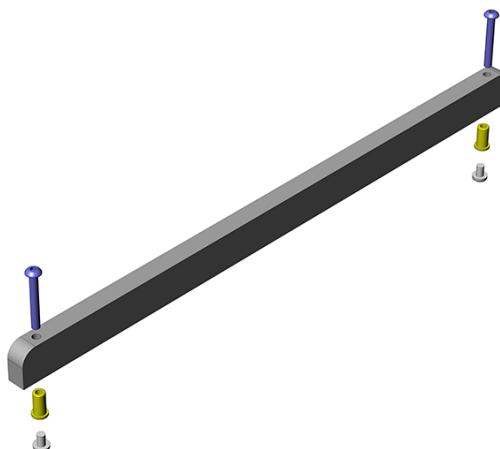

#### General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Material:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Functional units

FB-ATSMAXx

Reinforcement bar for pressure plate (NHP)

Set including installation accessories

Additional function

1 x reinforcement bar

1.0037, galvanised

10 mm [.393 in]

20 mm [.787 in]

0.9 kg [1.98 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

#### Compatible with

Exchangeable kits version:

No RF

#### Technical data

Length: 334 mm [13.1 in]

Outer dimensions (WxDxH): 10 x 334 x 20 mm [.393 x 13.1 x .787 in]

Reinforcement set

**FB-VSL-KIT-NDH-ATSMA13/14**


Item 46013



GO TO PRODUCT

**ingun**<sup>®</sup>

Partner for Future Technology

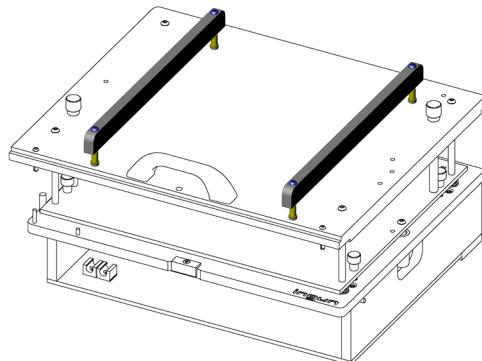

#### **INGUN Prüfmittelbau GmbH**

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
**MA functional units**



[ingun.com](http://ingun.com)

FUNCTIONAL UNIT