

Detection - contacted FB-ABF-K-S-ATSMAXx


Item 33510



GO TO PRODUCT

ingun[®]
Partner for Future Technology

- Upgrade kits to make operation easier, increase the testing reliability, and to reduce handling times
- Available for manual test fixtures and exchangeable kits
- Wide range of varying functions

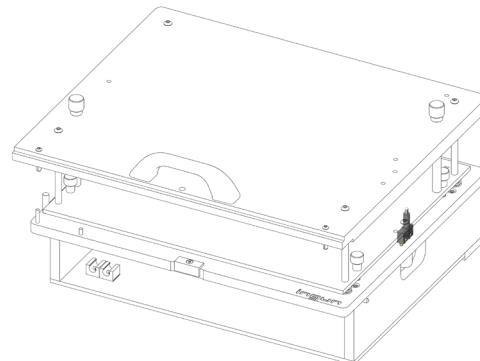

General data

Product group:
Series:
Type:
Version:
Accessory type:
Scope of delivery:
Width:
Height:
Min. temperature:
Max. temperature:
RoHS-compliant:

Functional units
FB-ATSMAXx
Pressure frame unit closed
Detection unit
Additional function
1x stroke switch
6.4 mm [.251 in]
36.2 mm [1.42 in]
-10 °C [14 °F]
85 °C [185 °F]
Yes

Compatible with

Exchangeable kits version:
MA exchangeable kits (ATS MA):

No limitations
ATS MAXx

Technical data

Connection:	Solder eyelet
Force:	1 N [3.59 ozf]
Max. current:	5 A
Installation:	M6
Max. voltage:	30 V
Length:	19.5 mm [.767 in]
Outer dimensions (WxDxH):	6.4 x 19.5 x 36.2 mm [.251 x .767 x 1.42 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
MA functional units

