

Receptacle

KS-100 47 05-18


Item KS-1004705-18




GO TO PRODUCT

ingun[®]

Partner for Future Technology

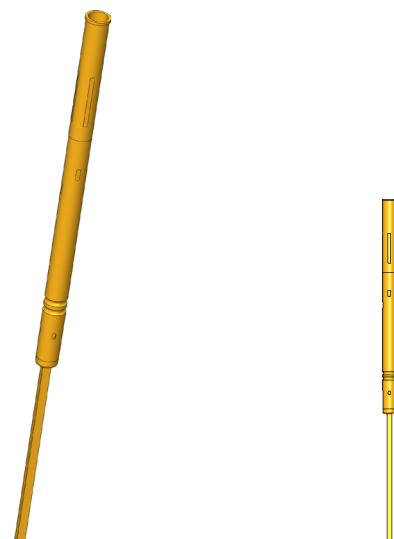

1:1

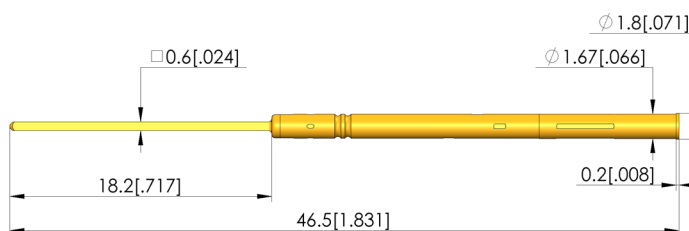

General data

Product group: Receptacles (KS)
 Series: KS-100
 Sub-series: KS-100 press-in version
 Type of receptacle connection: Wire-wrap
 Press ring: No
 Surface area: Gold
 Collar diameter: 1.8 mm [.07 in]
 Collar height: 0.2 mm [.007 in]
 Wire-wrap post length: 18.2 mm [.716 in]
 Knurl: No
 Vacuum-tight: yes (< 1 ccm / min)
 RoHS-compliant: Yes

Mechanical data

Total length: 46.5 mm [1.83 in]
 Outer diameter: 1.67 mm [.065 in]

Mounting hole

Mounting hole in CEM1: 1.68 – 1.69 mm [.066 – .066 in]
 Mounting hole in FR4: 1.69 – 1.7 mm [.066 – .066 in]
 Mounting hole with press ring in CEM1: 1.7 – 1.75 mm [.066 – .068 in]
 Mounting hole with press ring in FR4: 1.7 – 1.75 mm [.066 – .068 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
 78467, Constance, Germany
 Phone +49 7531 8105-0
 Customer hotline +49 7531 8105-888
 Fax +49 7531 8105-65
 info@ingun.com



Prices and delivery times on request.
 Technical changes reserved. 04/26_GB

Learn more about
 Test probes



RECEPTACLES

ingun.com