

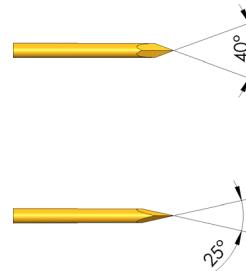
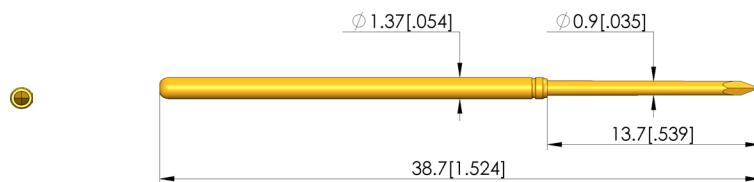
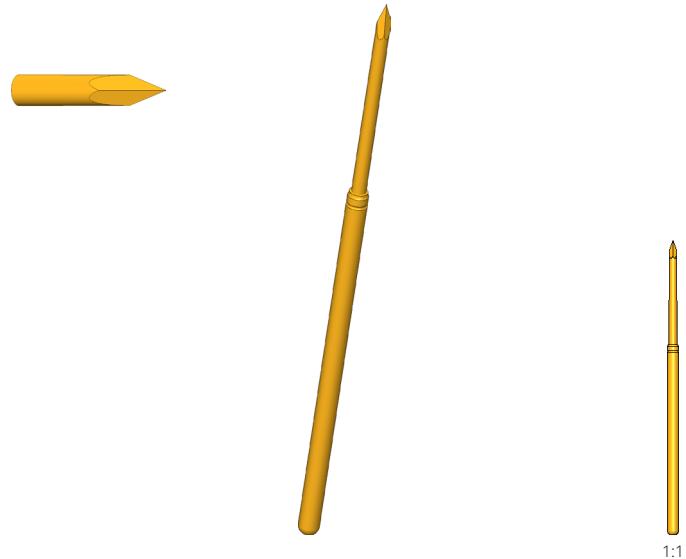


GO TO PRODUCT

- Long-stroke test probe for implementing combined ICT and FCT in a dual-stage fixture
- For optimum contact at the test points (e.g. pads, vias, and pins), various tip styles in different diameters and finishes, as well as various spring forces are available. spring forces.
- Used for setting the optimum stroke conditions in the test fixture, various installation heights can be achieved by combining test probes and receptacles

**Note:**

Receptacles in the series KS-100 are used for the GKS-135 test probes series.

**INGUN SELECTION****General data**

Product group: ICT / FCT (in-circuit test and function test)  
 Sub-product group: Long stroke GKS  
 Series: GKS-135  
 Grid: 2.54 mm [100 mil]  
 Contacting from: Via  
 Magnetic: Yes  
 Installation type: Plug-in  
 Quick-exchange system: Yes  
 Adjustable installation height: No  
 Non-rotating: No  
 Compatible receptacle(s): KS-100  
 Min. temperature: -40 °C [-40 °F]  
 Max. temperature: 80 °C [176 °F]  
 RoHS-compliant: Yes

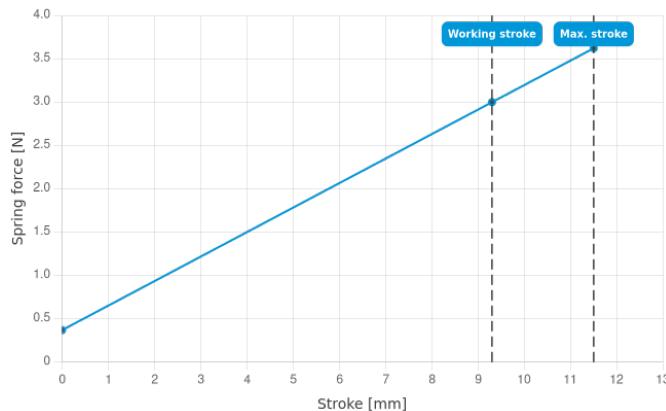
# Test Probe GKS-135 291 090 A 3000

Item GKS-135-0111



GO TO PRODUCT

**ingun**<sup>®</sup>  
Partner for Future Technology



## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 12/25\_GB

2 / 2

Learn more about  
ICT/FCT Test probes



[ingun.com](http://ingun.com)