

Test plug PS-TAE-006


Item 34847



ingun[®]

Partner for Future Technology

- Precise, low-wear contacting of tae plug connectors
- Outstanding service life
- Reliable data transmission
- Installation via floating mount
- Signal transmission via solder connection

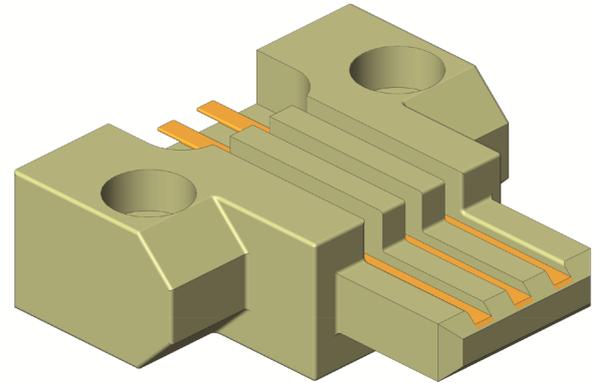

General data

Product group:	PS test plug
Series:	PS
Sub-series:	PS-TAE
Grid:	10.5 mm [413 mil]
DUT / contact:	TAE
DUT interface gender :	F signal conductor female / socket
Width:	30 mm [1.18 in]
Height:	10 mm [.393 in]
Min. temperature:	-80 °C [-112 °F]
Max. temperature:	150 °C [302 °F]
RoHS-compliant:	Yes

Inner conductor data

Inner conductor max. current load capacity:	1 A
Number of inner conductor poles:	6

Mechanical data

Total length:	30 mm [1.18 in]
---------------	-----------------


Test plug
PS-TAE-006

Item 34847



ingun[®]

Partner for Future Technology

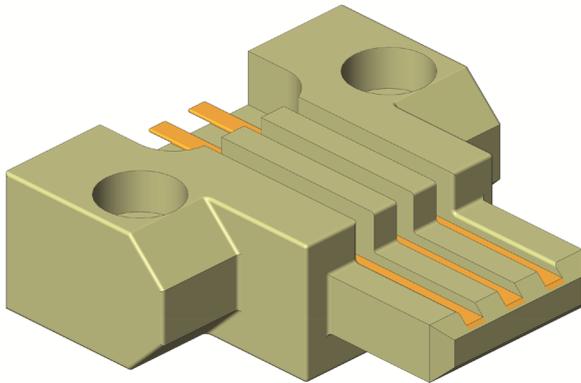

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 02/26_GB

Learn more about
Test probes

