

Locking unit - closed FB-VER-G-P-MAxxxx

Item 49270



GO TO PRODUCT


ingun[®]

Partner for Future Technology

- Secure locking of closed pressure frame during contacting

Application

To lock the closed pressure frame during contacting to ensure tests are not interrupted.

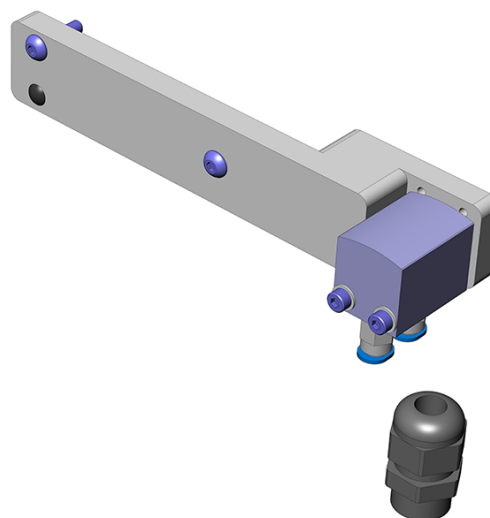

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Locking units

FB-MAxxxx

Pneumatic

Additional function

Unassembled

40 mm [1.57 in]

31 mm [1.22 in]

0.3 kg [.661 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Manual test fixtures (MA):

Accessories:

MA xxxx

ATE VAxxxx

Technical data

Stroke:

10 mm [.393 in]

Connection:

QSM-M5-4

Installation:

Thread M4


Compressed air connection:

Length:

147 mm [5.78 in]

Outer dimensionS (WxDxH):

40 x 147 x 31 mm [1.57 x 5.78 x 1.22 in]

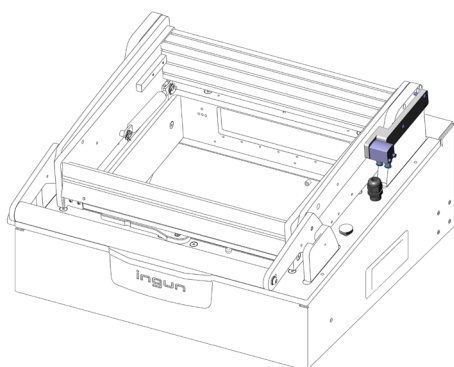

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 11/25_GB

Learn more about
MA functional units



ingun.com

FUNCTIONAL UNIT