

Connector - multipole male STV-VG64ac-M-WW-G13

Item 4864




GO TO PRODUCT

ingun[®]
Partner for Future Technology

- Trusted connector for multi-pole electric signal transmission
- Reliable connection and signal transmission
- Quick, easy, space-saving installation

Application

VG multipoint connectors are used as pluggable connectors for multi-pole electrical signal transmission of low voltages within the scope of their specification.

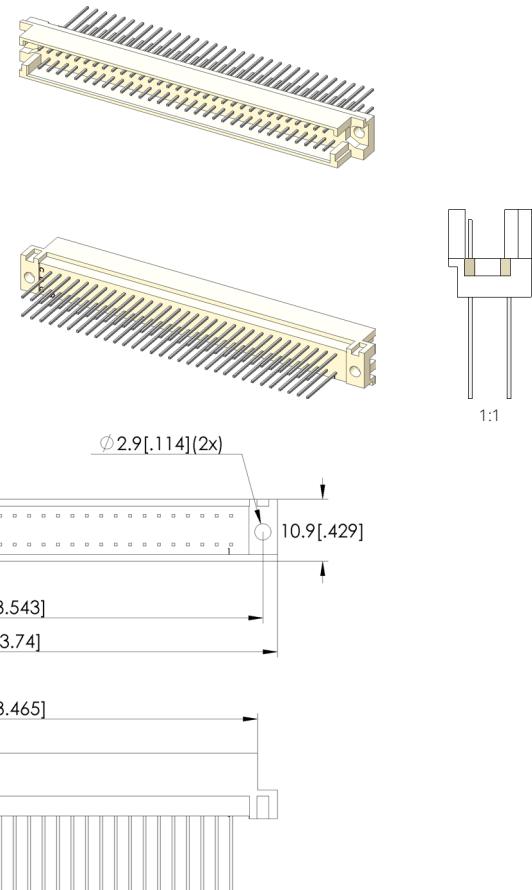

General data

Product group:
Series:
Type:
Version:
Accessory type:
Component assembly:
Material:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

VG-multipoint connectors
VG
Multipoint connector
C, straight with axial bore
Customising accessories
ac
Contacts, gold-plated
10.9 mm [.429 in]
24.8 mm [.976 in]
0.01 kg [.022 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Side approach mechanism:
Accessories:

SAM-M-14-300N-268-145

Technical data

Connection:	Wire-wrap posts
Current rating:	2 A
Installation:	Bore D = 2.9 mm
Number of poles:	64
Installation grid:	2.54 mm [.1 in]
Length:	95 mm [3.74 in]
Post length:	13 mm [.511 in]
Outer dimensionS (WxDxH):	95 x 10.9 x 24.8 mm [3.74 x .429 x .976 in]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB