

Switching Probe (NO)

SKS-215 306 200 A 1502

Item SKS-215-0384




GO TO PRODUCT


ingun[®]

Partner for Future Technology

- For a wide range of applications: performs components detection check, is a switch for detecting closed/open states, and a signal transmitter for process control
- The electrical connection is ensured by installation using a receptacle
- Designed as normally open (NO), i.e. The circuit is closed when actuated



1:1

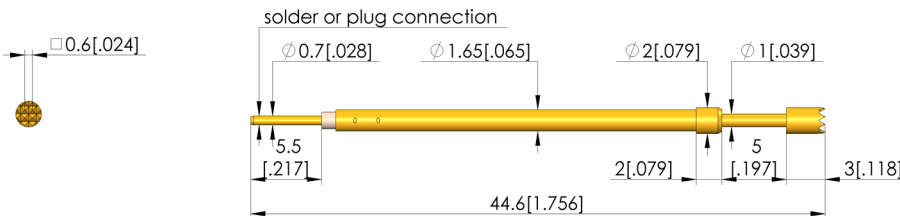

General data

Product group:
Sub-product group:
Series:
Grid:
Contacting from:
Magnetic:
Installation type:
Quick-exchange system:
Type of test probe connection:
Adjustable installation height:
Non-rotating:
Compatible connector(s):
Compatible receptacle(s):
Min. temperature:
Max. temperature:
RoHS-compliant:

SKS (pressed-in)
SKS (pressed-in)
SKS-215
2.54 mm [100 mil]
Post
Yes
Plug-in
No
Plug
No
No
SE-215
KS-215
-40 °C [-40 °F]
80 °C [176 °F]
Yes

Tip style data

Tip style:
Tip diameter:
Tip style surface:
Tip style material:

06 serrated
2 mm [0.078 in]
A gold
3 CuBe

Electrical data

Current load capacity / rated current:

3 A

Mechanical data

Total length:
Barrel diameter:
Maximum stroke:
Spring pre-load:
Collar height:
Switch path:
Switching point:
Spring force at switching point:

44.6 mm [1.75 in]
1.65 mm [0.064 in]
5 mm [0.196 in]
0.25 N [0.899 ozf]
02
1.5 mm [0.059 in]
8.5 mm [0.334 in]
0.45 N [1.61 ozf]

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 12/25_GB

Learn more about
Test probes



ingun.com