

# Interface support

## SSA-88xx-M-MAxx13

Item 115272




**ingun**<sup>®</sup>

Partner for Future Technology

- Interface support für TERADYNE 88xx-M (Spectrum) interface
- Ideally designed for MA xx13 test fixtures
- Quick, easy installation on the bottom of the test fixture
- Reliable connection from test fixture to system interface

### Application

The interface frame (SSA) is used for reliable connection of the interface (SST) to the test fixture.

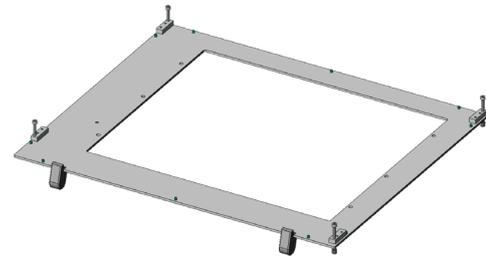

### General data

Product group:	Housing
Series:	SSA-MAxxxx
Type:	88xx-M (Teradyne)
Version:	MA xx13
Accessory type:	Additional function
Scope of delivery:	Unassembled
Width:	508 mm [20 in]
Height:	45.8 mm [1.8 in]
Weight:	1.5 kg [3.3 lbs]
Min. temperature:	10 °C [50 °F]
Max. temperature:	60 °C [140 °F]
RoHS-compliant:	Yes

### Compatible with

Manual test fixtures (MA):	MA xx13
Accessories:	SST-88xx-M

### Technical data

Length:	612 mm [24 in]
Outer dimensionS (WxDxH):	612 x 508 x 45.8 mm [24 x 20 x 1.8 in]

# Interface support SSA-88xx-M-MAxx13

Item 115272



**ingun**<sup>®</sup>

Partner for Future Technology



## INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162  
78467, Constance, Germany  
Phone +49 7531 8105-0  
Customer hotline +49 7531 8105-888  
Fax +49 7531 8105-65  
info@ingun.com



Prices and delivery times on request.  
Technical changes reserved. 01/26\_GB

Learn more about  
Test fixture kits

