# Contact Terminal

## KT-S-039 57 27

Item KT-S039-0001

GO TO PRODUCT

ingun®
Partner for Future Technology

- Use of larger test probes for increased contacting accuracy and longer service life
- Compatible with existing socketless systems
- Variable installation height allows for optimal consideration of different test point levels

NEW

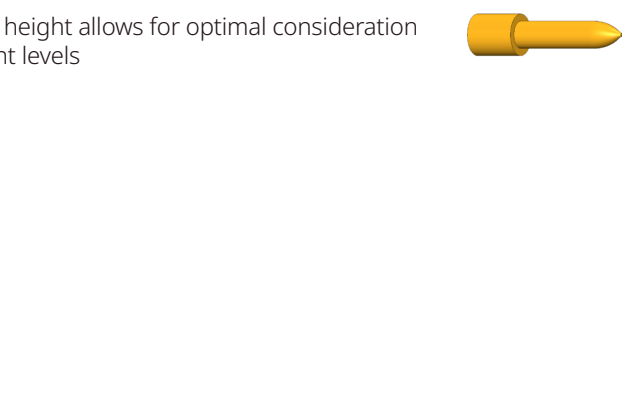

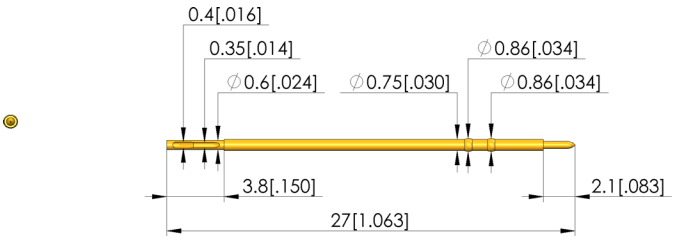





### General data

| | |
|---|---|
| Product group: | Contact terminals (KT) |
| Series: | KT-S039 |
| Sub-series: | KT-S039 standard |
| Grid: | 1 mm [39.3 mil] |
| Type of contact terminal connection: | Wire-grip |
| Magnetic: | Yes |
| Installation type: | Press-in |
| Quick-exchange system: | No |
| Surface area: | A gold |
| Material: | 3 CuBe |
| Knurl: | No |
| RoHS-compliant: | Yes |

### Tip style data

| | |
|---|---|
| Tip diameter: | 0.49 mm [.019 in] |

### Mechanical data

| | |
|---|---|
| Total length: | 27 mm [1.06 in] |
| Shaft diameter: | 0.75 mm [.029 in] |
| Latching lug: | No |

### Mounting hole

| | |
|---|---|
| Mounting hole in CEM1: | 0.8 – 0.82 mm [.031 – .032 in] |
| Mounting hole in FR4: | 0.8 – 0.82 mm [.031 – .032 in] |

**INGUN Prüfmittelbau GmbH**
Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com

Learn more about
**Test probes**

Prices and delivery times on request.
Technical changes reserved. 03/26_GB



ingun.com

CONTACT TERMINALS