

Cable plug assembly, coaxial

SE-RG178-50110MG075

Item SE-RG178-0005



GO TO PRODUCT


ingun®

Partner for Future Technology

- Plug or cable assemblies for RF test probes (HFS)



1:1

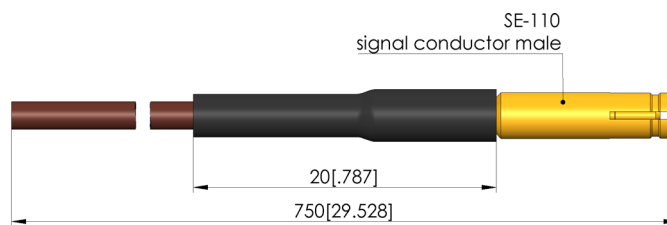

General data

Product group:
Series:
Sub-series:
Min. temperature:
Max. temperature:
RoHS-compliant:

Assemblies
SE-RG178
SE-RG178 plug
-55 °C [-67 °F]
135 °C [275 °F]
Yes

Electrical data

Maximum frequency:
Impedance:
Cable shielding:
Maximum performance:
Performance coefficient:
Dielectric strength AC:
Attenuation coefficient a:
Attenuation coefficient b:

.7 GHz
50 Ohm
Simple
71 W
59 RG178
1 kV
1,40800 RG178
0,22960 RG178

Cable data

Cable length:
Cable type:
Kink protection cable:
Attenuation Fmax:

750 mm [29.5 in]
Shrink-on sleeve, black, 20 mm
1 dB

Connector data

Interface 1:
Interface gender 1:
Version 1:
Interface 2:

SE-110 plug connector for HFS-110
M signal conductor male / plug
Straight
Open cable end

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 05/26_GB

Learn more about
Test probes



PLUG AND CABLE