



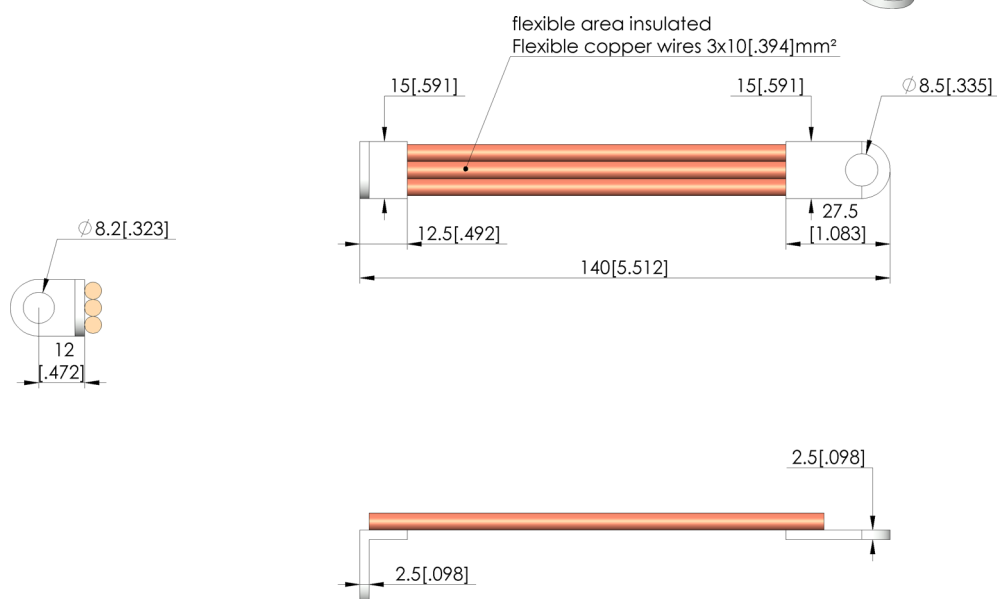

- Extremely low resistance cables made of pure copper wires with tin plated connectors
- Flexible copper cables to compensate the movement of the plunger
- Engineered to be exceptionally flexible, ensuring it exerts virtually no force on the continuous plunger probe
- Insulation made out of a transparent and thin silicone tube

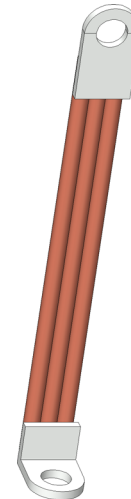

General data

Product group:

Series:

Sub-series:

Min. temperature:

Max. temperature:

RoHS-compliant:

Assemblies

SE-AWG08

SE-AWG08 plug with AWG08 cable

-40 °C [-40 °F]

80 °C [176 °F]

Yes

Cable data

Cable length:

140 mm [5.51 in]

Cable type:

Connector data

Interface 1: AN-0003 cable eye Winkel - width 15mm, Bohrung 8.2mm

Interface gender 1: F signal conductor female / socket

Version 1: Right angle

Interface 2: AN-0004 cable eye gerade - width 15mm, Bohrung 8.5mm

Interface gender 2: F signal conductor female / socket

Version 2: Straight

Electrical data

Cable shielding:

Simple

cable assembly

SE-AWG08-6-AN0003-100-AN0004-3

Item SE-AWG08-0002



GO TO PRODUCT

ingun[®]

Partner for Future Technology

Test probes

Part no.	Designation	Version
BCP-694-0001	BCP-694 360 1400 A 60004-53	Battery contacting probe
BCP-694-0002	BCP-694 360 1250 A 45004-53	Battery contacting probe
BCP-694-0003	BCP-694 360 1400 A 60004-63	Battery contacting probe

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 03/26_GB

Learn more about
Test probes



ingun.com

PLUG AND CABLE