

Pneumatic control unit

FB-STP-OSA-ZSK/VKH/NDH

Item 115870



GO TO PRODUCT

ingun[®]

Partner for Future Technology


- Reliable control of the automatic opener/closer for vacuum test fixtures
- Compact design for installing in the interior of the test fixture
- With pneumatic diagram and functional description

NEW

Application

The pneumatic control system is used for reliable control of the automatic opener/closer for vacuum test fixtures. In addition to a pressure regulation valve, it has two throttle check valves for speed adjustment when opening and closing. The typical compressed air supply is 6 bar. The compressed air connection is made via a coupling socket with QS-4 quick connector.

Thanks to the compact design, the pneumatic control system can be easily positioned inside the test fixture.

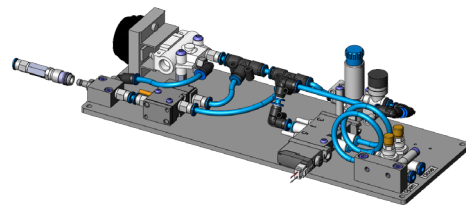

Delivery

The functional unit is supplied pre-assembled,

General data

Product group:

Series:

Type:

Version:

Accessory type:

Scope of delivery:

Width:

Height:

Weight:

Min. temperature:

Max. temperature:

RoHS-compliant:

Functional units

FB-VAxxxx

VA automatic opener/closer

Additional function

Pre-assembled

100 mm [3.93 in]

71 mm [2.79 in]

0.6 kg [1.32 lbs]

10 °C [50 °F]

60 °C [140 °F]

Yes

Compatible with

Vacuum test fixtures (VA):

Accessories:

VA 20xx

FB-OSA-P-ZSK/VKH/NDH

Technical data

Connection:

Compressed air, 6 bar

Max. voltage:

24 VDC

Compressed air connection:

QS-4

Length:

280 mm [11 in]

Outer dimensionS (WxDxH):

100 x 280 x 71 mm [3.93 x 11 x 2.79 in]

Accessories

Part no.	Designation	Version
115857	FB-OSA-P-ZSK/VKH/NDH	Automatic opener/closer unit for vacuum test fixtures
116285	FB-ENT-NDH-P	Pressure frame unlocking unit, pneumatic

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162

78467, Constance, Germany

Phone +49 7531 8105-0

Customer hotline +49 7531 8105-888

Fax +49 7531 8105-65

info@ingun.com



Learn more about
Test fixture kits



Prices and delivery times on request.
Technical changes reserved. 11/25_GB