




GO TO PRODUCT

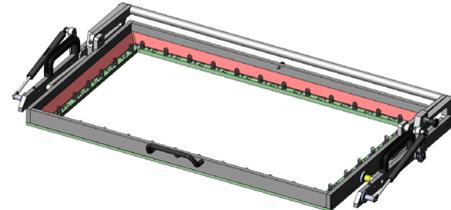

General data

Product group:
Series:
Type:
Version:
Accessory type:
Contact stroke generation:
Width:
Height:
Weight:
Min. temperature:
Max. temperature:
RoHS-compliant:

Mounted units
ZSK-VAxxxx
Excl. ATS ZSK2073
Parallel opening
Additional function
Vacuum
928 mm [36.5 in]
91 mm [3.58 in]
6.7 kg [14.7 lbs]
10 °C [50 °F]
60 °C [140 °F]
Yes

Compatible with

Exchangeable kits version:

No limitations

Technical data

Stroke: 60 mm [2.36 in]
Force: 200 N [719 ozf]
Pushrod length: 15 mm [.59 in]
Test probe installation height, top: 16 mm [.629 in]
Free space above PCB: 13 mm [.511 in]
Useable area (WxD): 630 x 350 mm [24.8 x 13.7 in]
Length: 539 mm [21.2 in]
Outer dimensionS (WxDxH): 928 x 539 x 91 mm [36.5 x 21.2 x 3.58 in]

Additional contacting unit

ZSK-10P-VAx70L


Item 35361



GO TO PRODUCT

ingun[®]

Partner for Future Technology

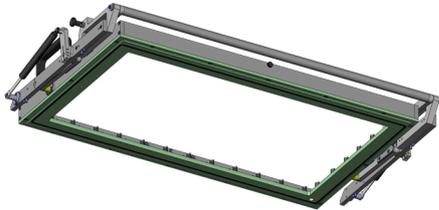

INGUN Prüfmittelbau GmbH

Max-Stromeyer-Straße 162
78467, Constance, Germany
Phone +49 7531 8105-0
Customer hotline +49 7531 8105-888
Fax +49 7531 8105-65
info@ingun.com



Prices and delivery times on request.
Technical changes reserved. 01/26_GB

Learn more about
Test fixture kits

